
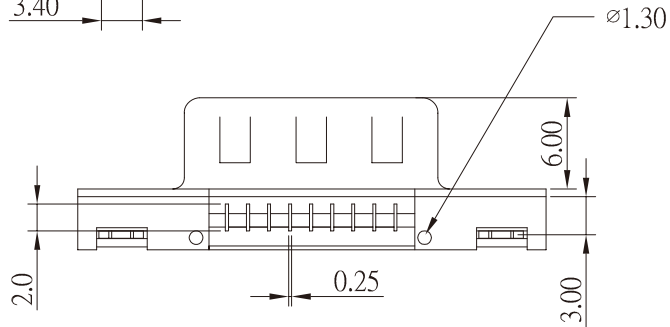
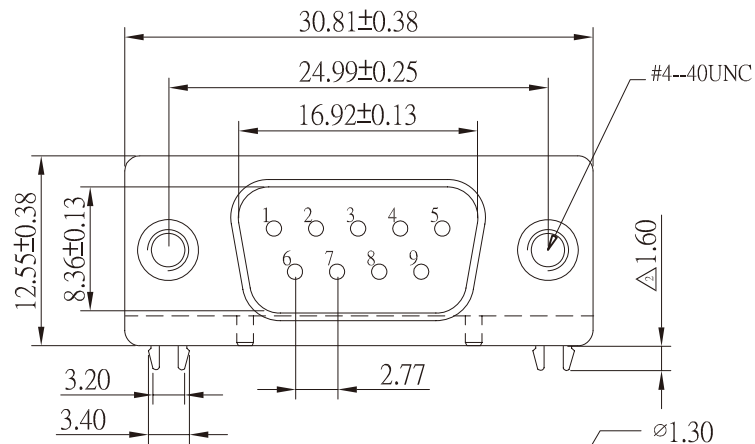
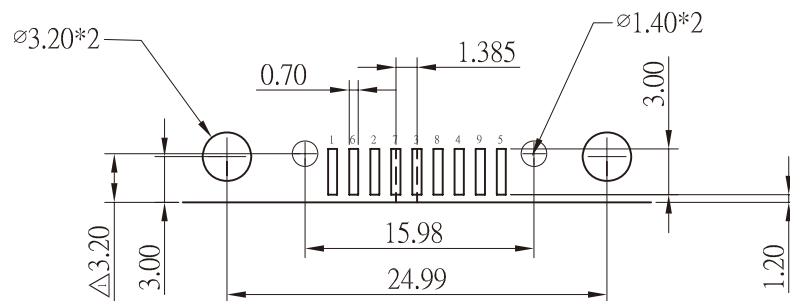


MATERIAL
HOUSING : HIGH TEMPERATURE HOUSING
NY-9T (UL94V-0) WITHSTANDS IR AND
VPR SOLDERING METHODS.
CONTACTS : PHOSPHOR BRONZE.
PLATING : SELECTIVE GOLD PLATED.

SPECIFICATION
CURRENT RATING : 1AMP.
INSULATOR RESISTANCE 5000MΩ MIN. AT DC 500V.
CONTACT RESISTANCE : 20MΩ MAX. AT DC 100mA.
OPERATING TEMPERATURE : -65°C~+125°C.
MAX PROCESSING TEMPERATURE: 260±10°C FOR 3~5 SECONDS.

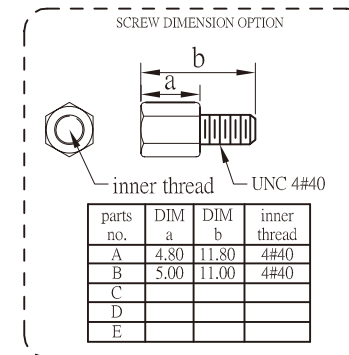

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

TOLERANCES ARE

X. ±
.X ± 0.50
.XX ± 0.20
.XXX ± 0.30
ANG ± 3°

照片框

ORDER INFORMATION

DW-PNZ1H-09-LF

SERIES DW-PNZ1H-09-LF
LEADFREE
09WAY
HEX SCREW
CLIP
NUT
MALE

DESCRIPTION: D-SUB CONNECTOR SLIM SMT TYPE (1.20mm) 09 MALE