


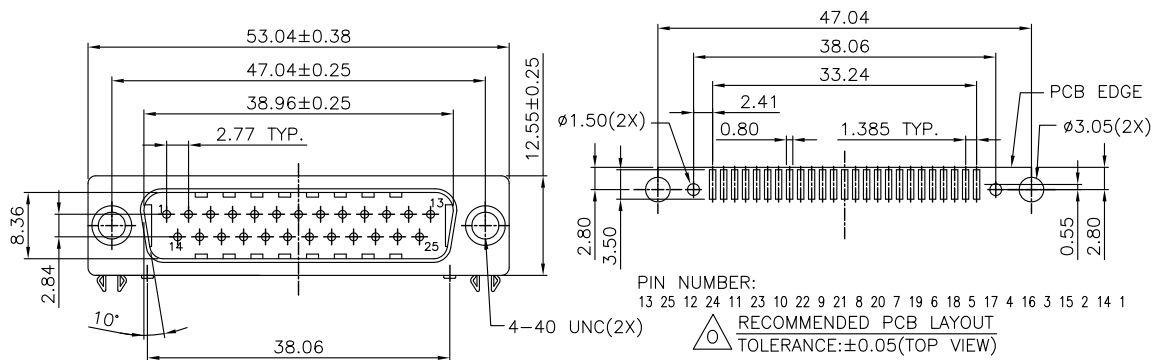

#### NOTES:

##### 1.MATERIAL:

HOUSING:HIGH TEMP THERMOPLASTIC,UL94V-0,BLACK COLOR  
 TERMINAL:PHOSPHOR BRONZE  
 METAL SHELL:SPCC  
 BOARD LOCK & NUT:BRASS

##### 2.PLATING:

###### TERMINAL:



CONTACT AREA:SELECTIVE GOLD(Au) PLATING  
 SOLDER TAIL:TIN(Sn),THICKNESS=100 MICROINCH MIN.(2.54 MICROMETER MIN.)  
 UNDER PLATE:NICKEL(Ni),THICKNESS=50 MICROINCH MIN.(1.27 MICROMETER MIN.)

###### METAL SHELL:


NICKEL(Ni),THICKNESS=80 MICROINCH MIN.(2.032 MICROMETER MIN.)  
 UNDER PLATE:COPPER(Cu),THICKNESS=40 MICROINCH MIN.(1.016 MICROMETER MIN.)  
 BOARD LOCK:

TIN(Sn),THICKNESS=80 MICROINCH MIN.(2.032 MICROMETER MIN.)  
 UNDER PLATE:NICKEL(Ni),THICKNESS=50 MICROINCH MIN.(1.27 MICROMETER MIN.)  
 NUT:NICKEL(Ni),THICKNESS=50 MICROINCH MIN.(1.27 MICROMETER MIN.)

##### 3.RECOMMENDED PCB THICKNESS:1.60±0.05mm

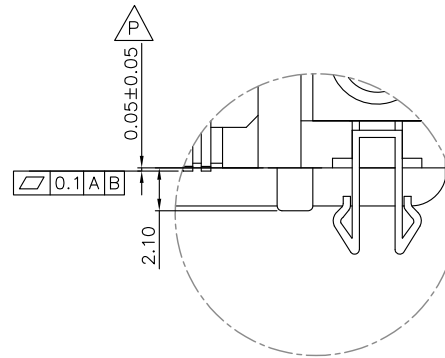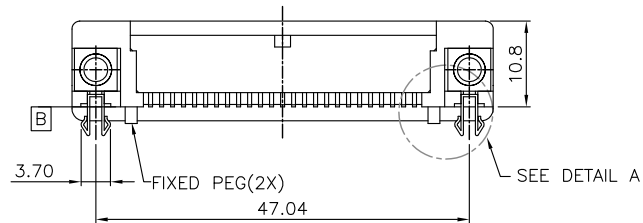

DETAIL A  
 SCALE 3:1

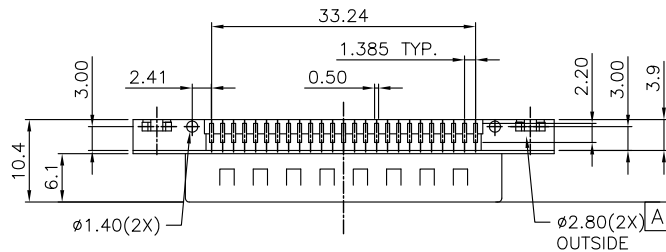

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ± 3°

照片框

#### ORDER INFORMATION

DW-PNZ2-25-LF  
 SERIES NUT MALE  
 CLIP  
 25 WAY  
 LEADFREE

DESCRIPTION: D SUBMINIATURE, RIGHT ANGLE  
 SURFACE-MOUNT LOW PROFILE 25 POSITION, MALE