


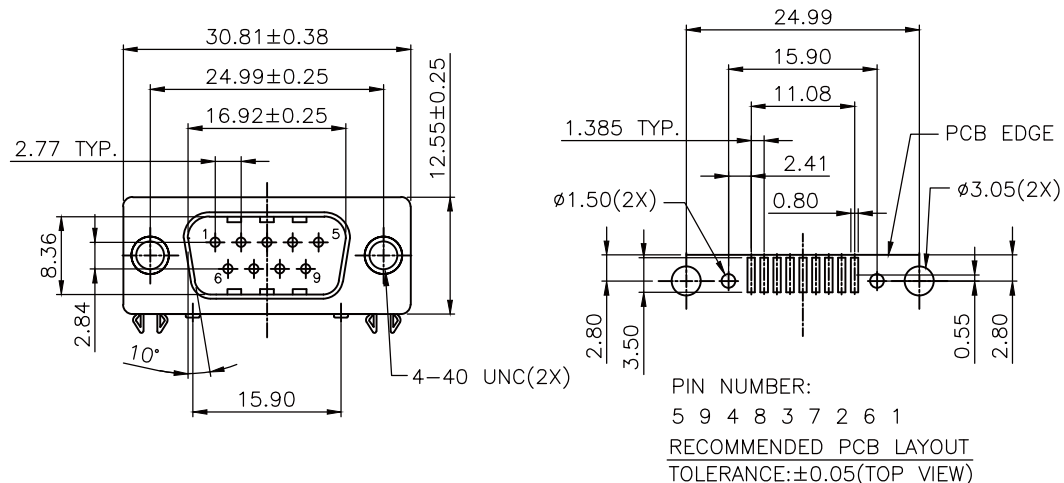

NOTES:

1. MATERIAL:

HOUSING: HIGH TEMP THERMOPLASTIC, UL94V-0

TERMINAL: PHOSPHOR BRONZE

METAL SHELL: SPCC

BOARD LOCK & NUT: BRASS

2. PLATING:

TERMINAL:

CONTACT AREA: SELECTIVE GOLD (Au) PLATING

SOLDER TAIL: TIN (Sn), THICKNESS=100 MICROINCH MIN. (2.54 MICROMETER MIN.)

UNDER PLATE: NICKEL (Ni), THICKNESS=50 MICROINCH MIN. (1.27 MICROMETER MIN.)

METAL SHELL:

NICKEL (Ni), THICKNESS=80 MICROINCH MIN. (2.032 MICROMETER MIN.)

UNDER PLATE: COPPER (Cu), THICKNESS=40 MICROINCH MIN. (1.016 MICROMETER MIN.)



BOARD LOCK:

TIN (Sn), THICKNESS=80 MICROINCH MIN. (2.032 MICROMETER MIN.)


UNDER PLATE: NICKEL (Ni), THICKNESS=50 MICROINCH MIN. (1.27 MICROMETER MIN.)

NUT: NICKEL (Ni), THICKNESS=50 MICROINCH MIN. (1.27 MICROMETER MIN.)

3. RECOMMENDED PCB THICKNESS: 1.60±0.05mm

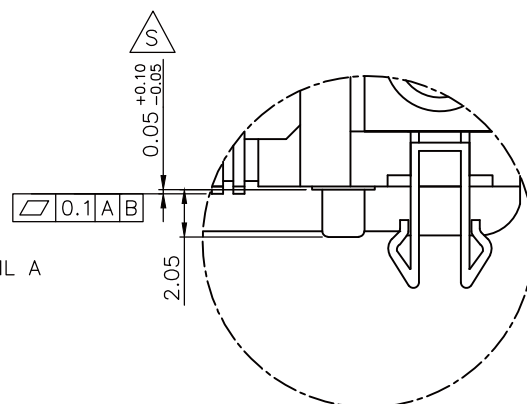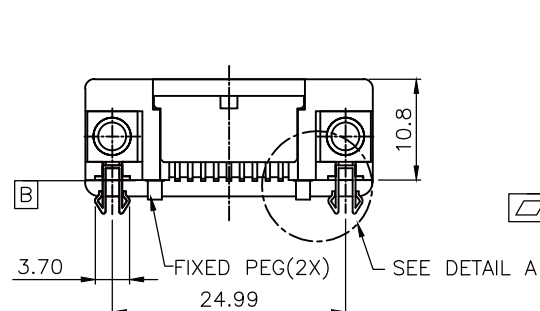

SCALE 3:1

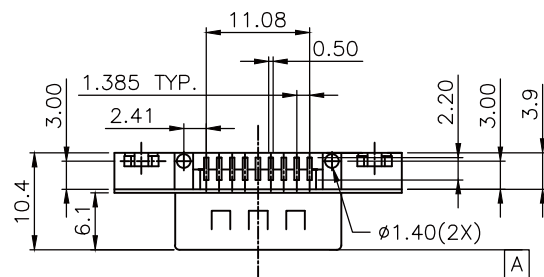

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION


X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°

照片框

ORDER INFORMATION

DW-PNZ2R-09-LF
SERIES | REEL | LEADFREE
CLIP | 09 WAY
NUT | MALE


DESCRIPTION: D SUBMINIATURE, RIGHT ANGLE SURFACE-MOUNT LOW PROFILE 9 POSITION, MALE

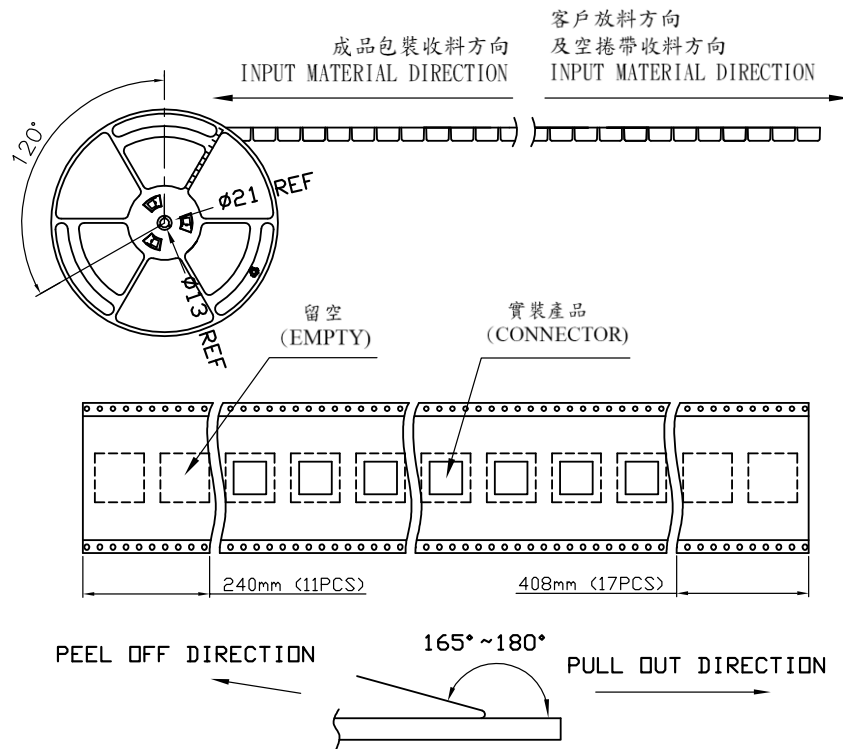

PEELING SPEED	300mm/MIN±10mm/MIN
FORCE	30g~130g

NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Black Conductive Polystyrene Alloy.
4. All dimensions meet EIA-481-C requirements.
5. Thickness : 0.40 ± 0.05 mm.
6. Packing length per 13" reel : 4.4 Meters. (蓝色旋转圆盘)
7. Component load per 13" reel : 150 pcs.

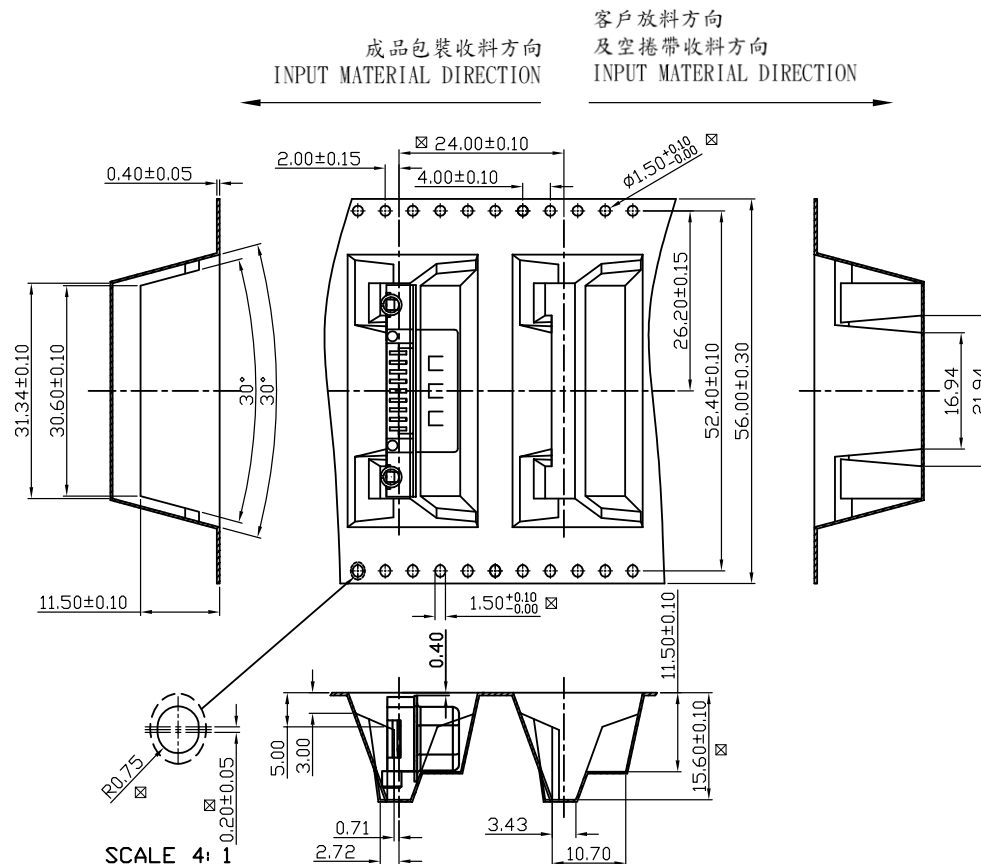

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.13
.XXX ±
ANG ±

照片框


ORDER INFORMATION

DW-PNZ2R-09-LF
SERIES | T | LEADFREE
09 WAY
CLIP
NUT
MALE


DESCRIPTION: D SUBMINIATURE, RIGHT ANGLE SURFACE-MOUNT LOW PROFILE 9 POSITION, MALE

捲盤外圈增加3處透明膠帶固定 $\triangle$ D

PE袋
捲盤

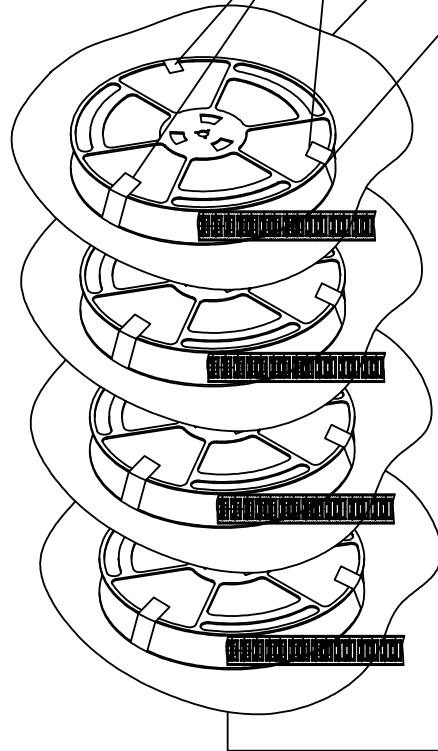

裝滿成品的卷盤放進
PE袋內, 然後加入乾
燥機, 抽真空後再放進
外箱內.

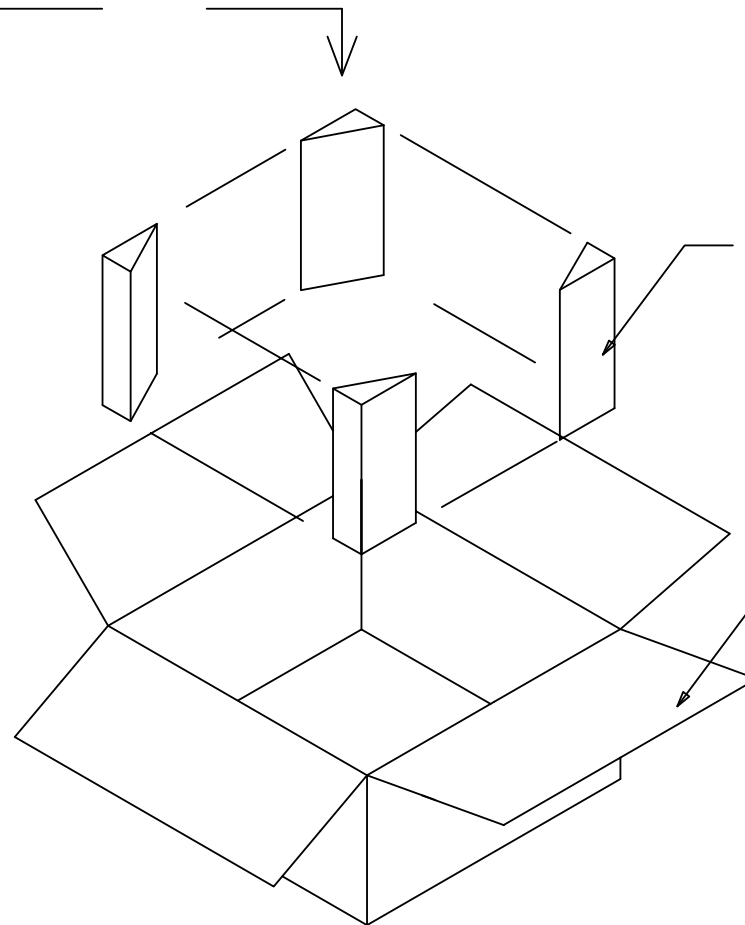

紙卡 128*128*210

紙箱(390X390X260)

FOR PRODUCT PART NO	PARTS PER CARTON (S. P. Q)	PARTS PER PEEL	TOTAL PEELS PER CARTON
SMT*- 9P	600	150	4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.13
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DW-PNZ2R-09-LF
SERIES REEL CLIP NUT MALE
LEADFREE
09 WAY

DESCRIPTION: D SUBMINIATURE, RIGHT ANGLE SURFACE-MOUNT LOW PROFILE 9 POSITION, MALE