


CURRNET RSTING	øA	øB	PART NO.
10 A	1.7	2.5	DWC-M-10
20 A	2.7	3.6	DWC-M-20
30 A	3.5	4.4	DWC-M-30
40 A	4.6	5.5	DWC-M-40

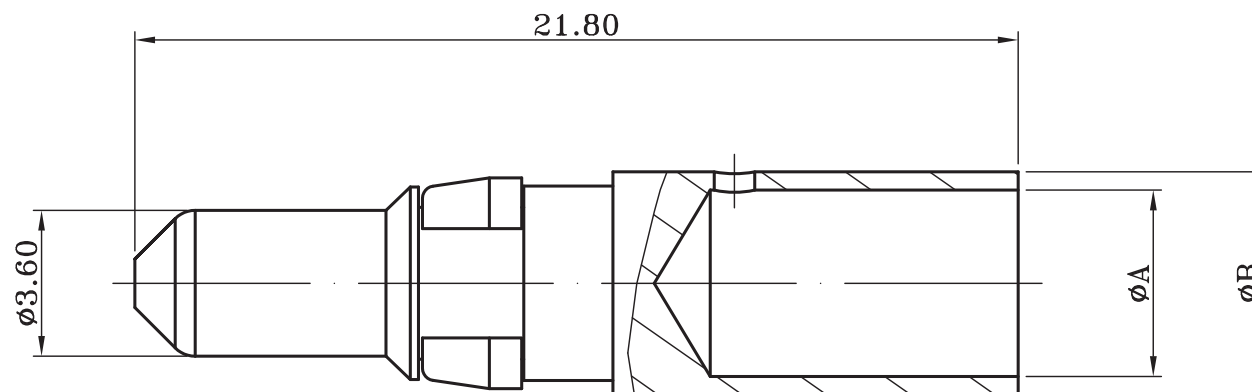

NOTE:

- CONTACTS: PRECISION MACHINED COPPER ALLOY
- CONTACT RESISTANCE : 1.0 mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE
TEMPERATURE RATING : -55°C ~ +125°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

DWC-M-xx-LF
SERIES T LEADFREE
10:10AMP
20:20AMP
30:30AMP
40:40AMP
MALE TERMINAL

DESCRIPTION: