


NOTE:

1. CONTACTS: PRECISION MACHINED COPPER ALLOY
 GOLD PLATED
2. CONTACT RESISTANCE : 1.0 mΩ MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE
 TEMPERATURE RATING : -55°C ~ +125°C

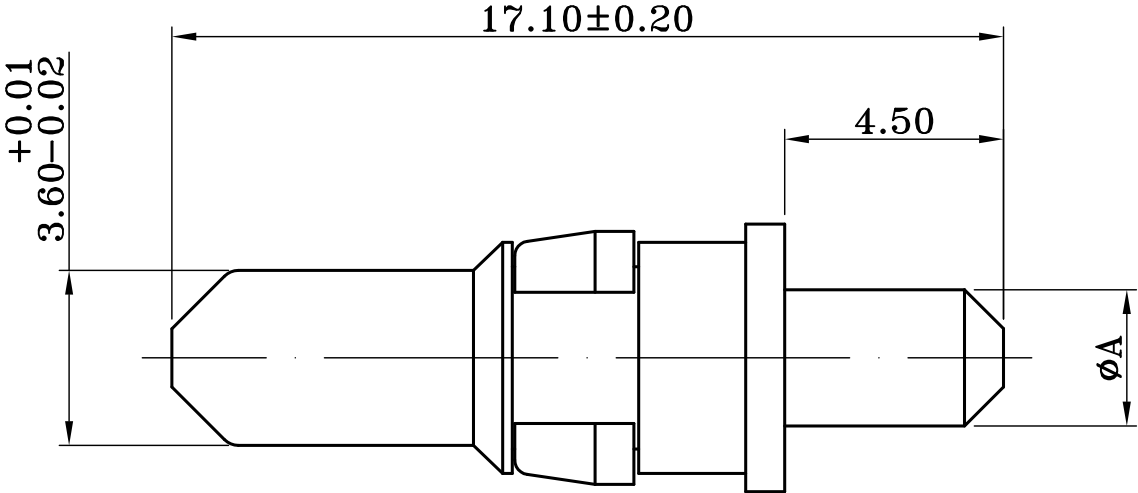

CURRNET RSTING	φA	PART NO.
10 A	1.70	DWD-M-10
20 A	2.80	DWD-M-20
40 A	3.75	DWD-M-40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

.XXX ± 0.10

DATE

ANG ± 5°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

DWD-M-xx-LF

SERIES

LEADFREE

10:10A

20:20A

40:40A

MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: