
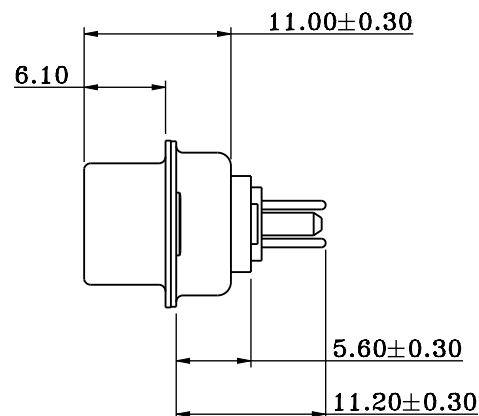


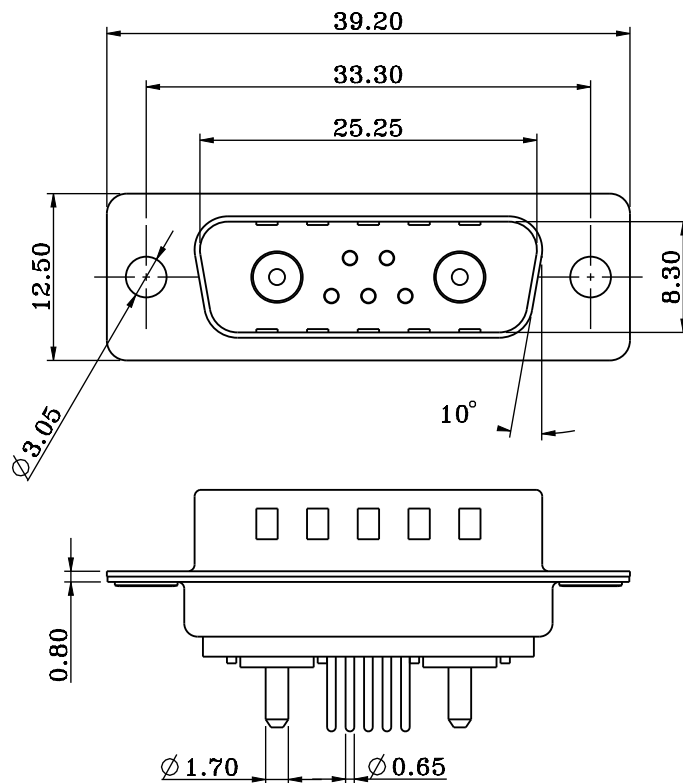


MATERIALS AND FINISH

SHELL: STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
 BACK SHELL NICKEL FINISHED
 DIMPLES ON PLUG ONLY
 INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED,
 UL 94V-0 RATED, BLACK COLOR
 SIGNAL CONTACT: COPPER ALLOY, FULL GOLD FLASH
 HIGH POWER CONTACT: COPPER ALLOY, FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING: 10 A
 HIGH POWER CONTACT RESISTANCE: 1.0 mΩ MAX.
 SIGNAL CONTACT CURRENT RATING: 5.0 A
 SIGNAL CONTACT RESISTANCE: 10 mΩ MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE
 INSULATION RESISTANCE: 5GΩ MIN.
 TEMPERATURE RATING: -55°C ~ +125°C

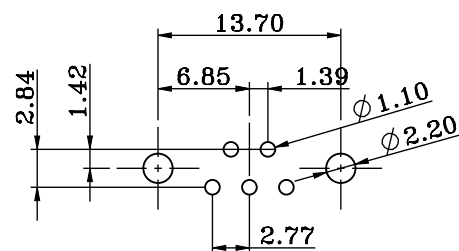

P.C.B LAYOUT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

DWD-P10-07W2-LF
 SERIES | 07W2 | LEADFREE
 10 AMPS
 MALE

DESCRIPTION: