


Table 1 Material	
Metal Shell	Steel/Dimples on Plug only
Insulator	UL94V-0 Thermoplastic 30% glass filled
Metal Bracket	Steel

Table 2 Finish	
Power Contact	Gold-plated
Signal Contact	Gold-plated
Metal Shell	Nickel plated
Metal Bracket	Nickel plated

Table 3 Electrical Data	
Operating Temperature	-55°C - +125°C
Insulator Resistance	Minimum 5000 MΩ

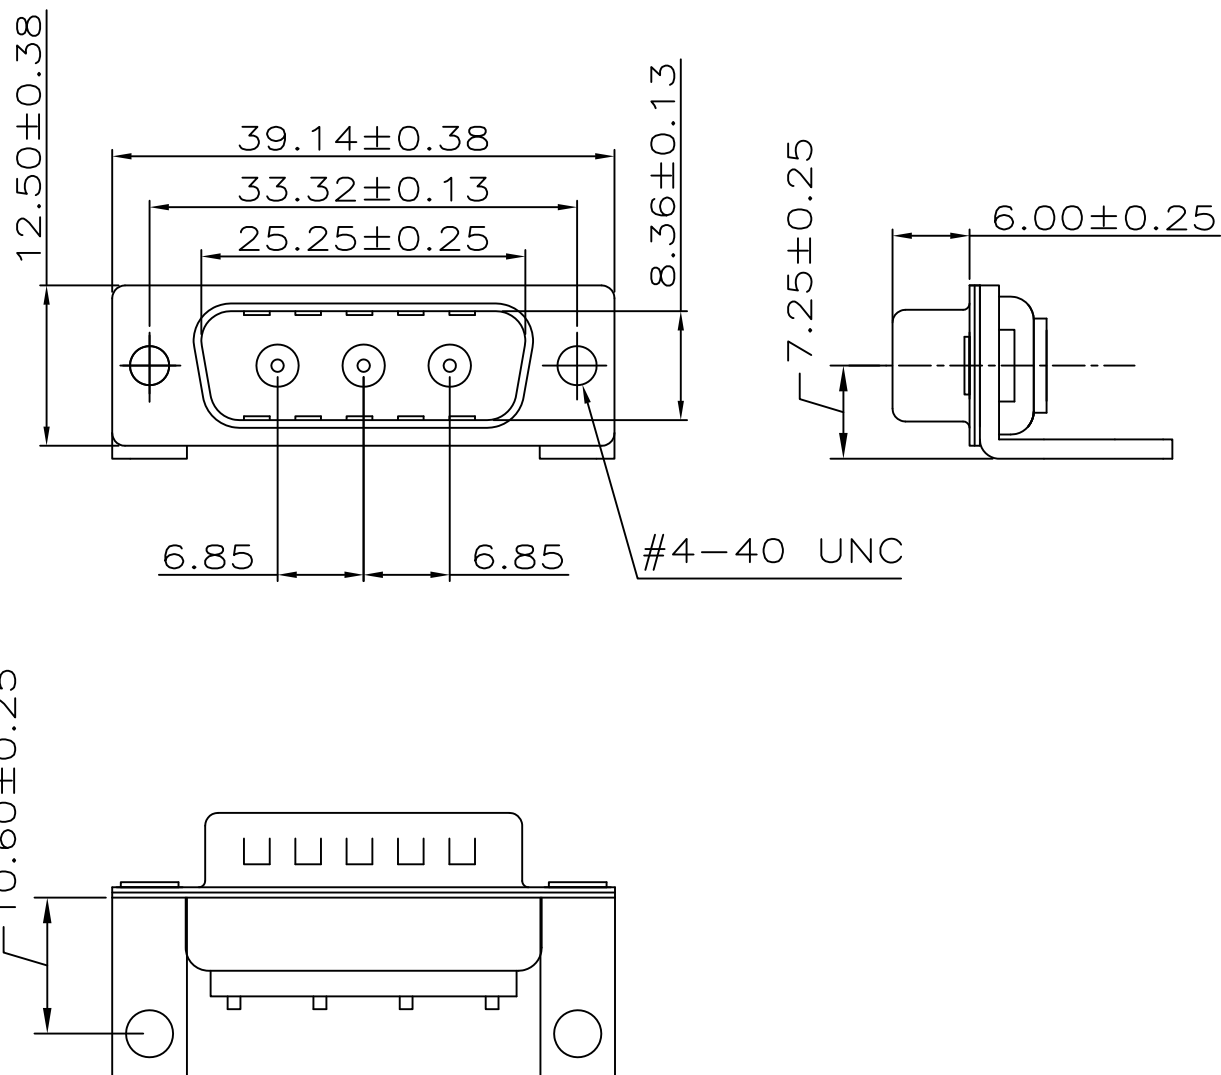

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±
X, ± 0.30
.XX ±
.XXX ±
ANG ±



照片框

ORDER INFORMATION

DWR-P00LN-03W3-LF

SERIES

NUT

BRACKET

MALE

LEADFREE

03W3

DESCRIPTION: D-SUB POWER SERIES 3W3 R/A TYPE