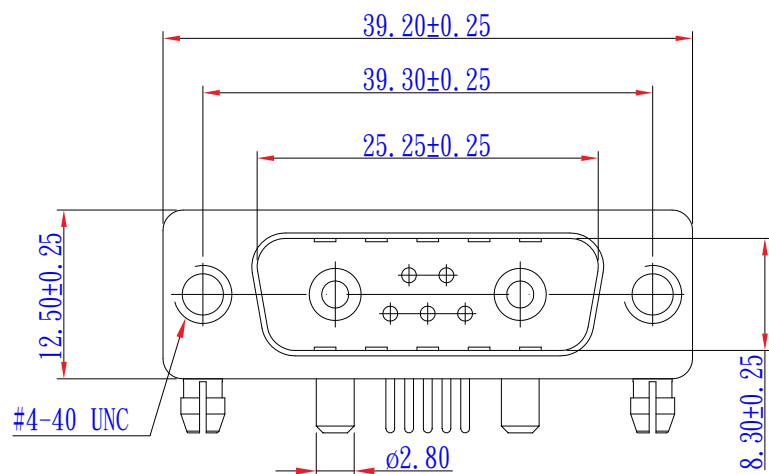


MATERIALS AND FINISH

SHELL : STEEL MATERIAL FRONT SHELL TIN FINISHED

BACK SHELL TIN FINISHED

DIMPLES ON PLUG ONLY

INSULATOR : PBT THERMOPLASTIC 30% GLASS FILLED

UL 94V-0 RATED BLACK COLOR

SIGNAL CONTACT : COPPER ALLOY FULL GOLD FLASH

HIGH POWER CONTACT : COPPER ALLOY 5u" GOLD PLATED


ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING : 20 AMPS

SIGNAL CONTACT CURRENT RATING : 7.5 AMPS

DIELECTRIC WITHSTANDING VOLTAGE : 1000VAC FOR 1 MINUTE

TEMPERATURE RATING : -55°C~+125°C

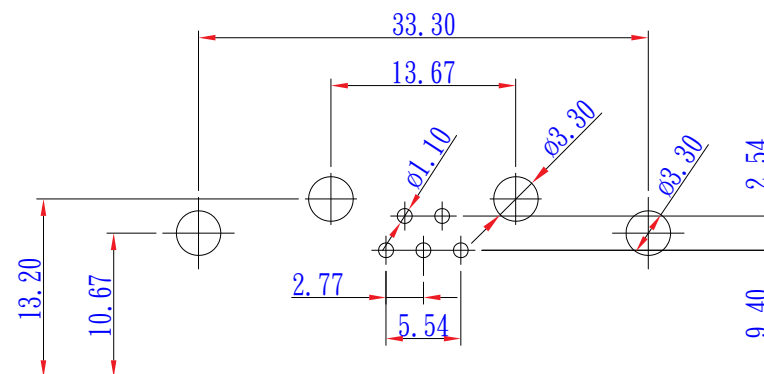

Recommended P.C Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

DWR-P20ZN-07W2-LF
SERIES CLIP+NUT 07W2 LEADFREE
20AMP
MALE

DESCRIPTION: