
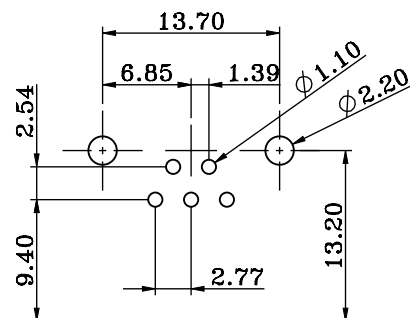
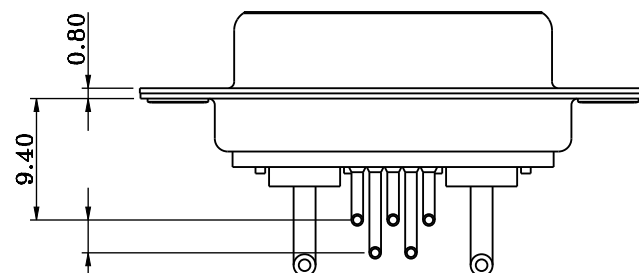
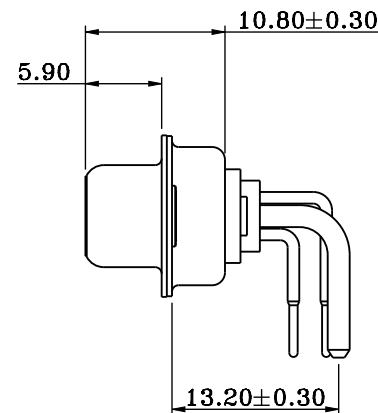


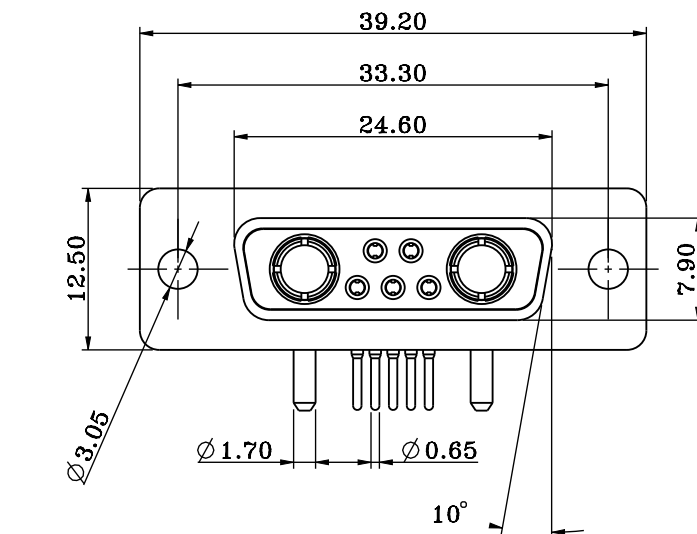

P.C.B LAYOUT

MATERIALS AND FINISH

SHELL: STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
BACK SHELL NICKEL FINISHED
DIMPLES ON PLUG ONLY

INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED,
UL 94V-0 RATED, BLACK COLOR

SIGNAL CONTACT: COPPER ALLOY, FULL GOLD FLASH

HIGH POWER CONTACT: COPPER ALLOY, FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING: 10 A

HIGH POWER CONTACT RESISTANCE: 1.0 mΩ MAX.

SIGNAL CONTACT CURRENT RATING: 5.0 A

SIGNAL CONTACT RESISTANCE: 10 mΩ MAX.

DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE

INSULATION RESISTANCE: 5GΩ MIN.

TEMPERATURE RATING: -55°C ~ +125°C

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ± 5°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

DWR-S10-07W2-LF

SERIES LEADFREE

07W2

10 AMPS

FEMALE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com