

PCB LAYOUT

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT SHELL TIN FINISHED
 BACK SHELL TIN FINISHED
 DIMPLES ON PLUG ONLY

INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED,
 UL 94V-0 RATED, BLACK COLOR

SIGNAL CONTACT : COPPER ALLOY, 30u" GOLD PLATED
 HIGH POWER CONTACT : COPPER ALLOY, 50u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING : 40 AMPS
 HIGH POWER CONTACT RESISTANCE : 1.0 mΩ MAX.
 SIGNAL CONTACT CURRENT RATING : 7.5 AMPS
 SIGNAL CONTACT RESISTANCE : 2.7 mΩ MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE
 INSULATION RESISTANCE : 5GΩ MIN.
 TEMPERATURE RATING : -55°C ~ +125°C

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE


SIZE A4

X.±
 .X±
 .XX±
 .XXX±
 ANG±

PJECTION

照片框

ORDER INFORMATION

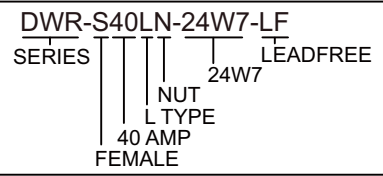

DESCRIPTION: