

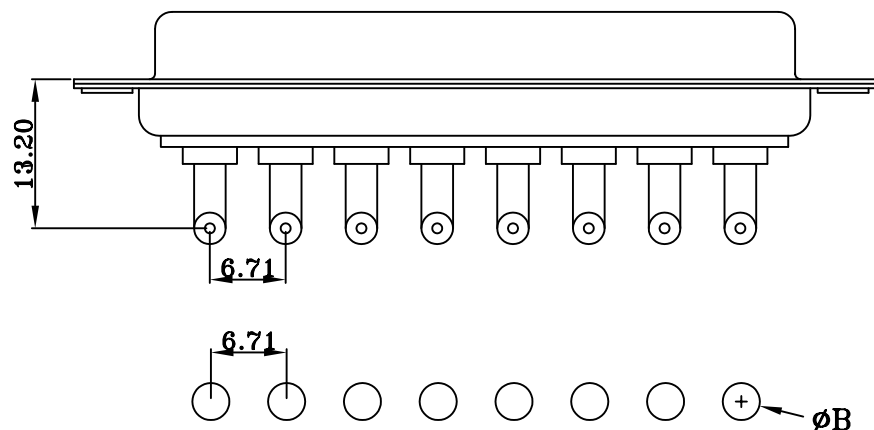


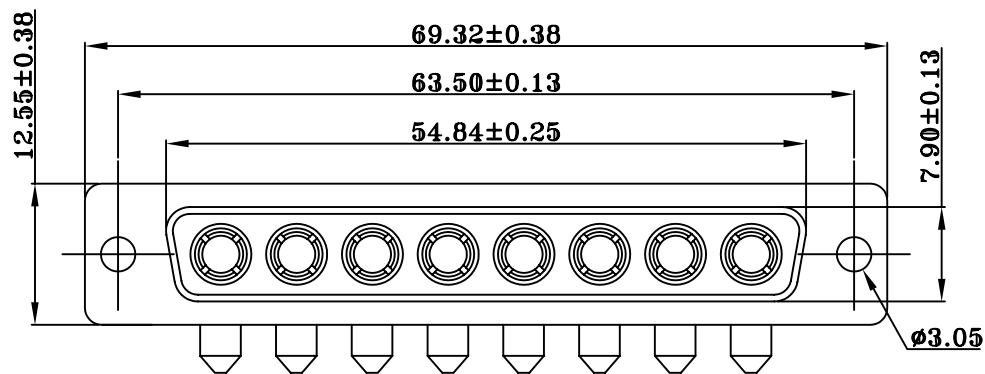

PCB LAYOUT



MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED

CONNECTOR INSULATOR : PBT THERMOPLASTIC,
30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR

HIGH POWER CONTACT MATERIAL: BRASS, 15u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING :10,20,OR 40 AMPS

HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE :

1000 V AC FOR 1 MINUTE

INSULATION RESISTANCE : 5000 MEGAOHMS MIN.

TEMPERATURE RATING : -55°C ~ +125°C

PART NO.	Dimension	current rating	Dimension ØB
DWR-S10-08W8	Ø1.70	10A	Ø2.20
DWR-S20-08W8	Ø2.80	20A	Ø3.28
DWR-S40-08W8	Ø3.75	40A	Ø4.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DWR-Sxx-08W8-LF

SERIES

LEADFREE

08W8

10:10Amps

20:20Amps

40:40Amps

FEMALE

DESCRIPTION: D-SUB CONNECTOR (Power Contact R/A DIP Type)