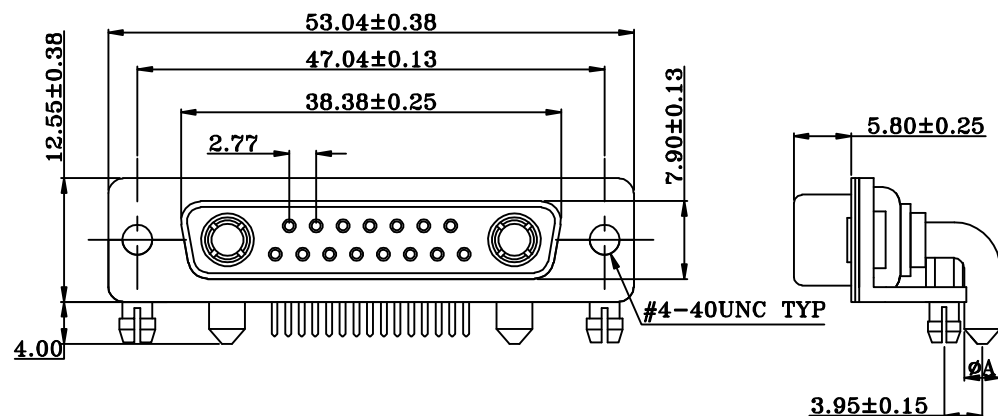


PCB LAYOUT

PART NO.	Current Rating	Dimension	Dimension
		ø A	øB
DWR-S40NZ-17W2	40 AMPS	ø3.75	ø4.20
DWR-S20NZ-17W2	20 AMPS	ø2.8	ø3.28
DWR-S10NZ-17W2	10 AMPS	ø1.7	ø2.20

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
CONNECTOR INSULATOR : PBT THERMOPLASTIC,
30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
SIGNAL CONTACT MATERIAL: BRASS, FULL GOLD FLASH
HIGH POWER CONTACT MATERIAL: BRASS, GOLD FLASH PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING :10,20,OR 40 AMPS
HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE :
1000 V AC FOR 1 MINUTE
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +150°C

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

DWR-SxxNZ-17W2-LF
SERIES
CLIP
NUT
17W2
LEADFREE
FEMALE
10:10Amps
20:20Amps
40:40Amps

DESCRIPTION: D-SUB CONNECTOR (Power Contact R/A DIP Type)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com