


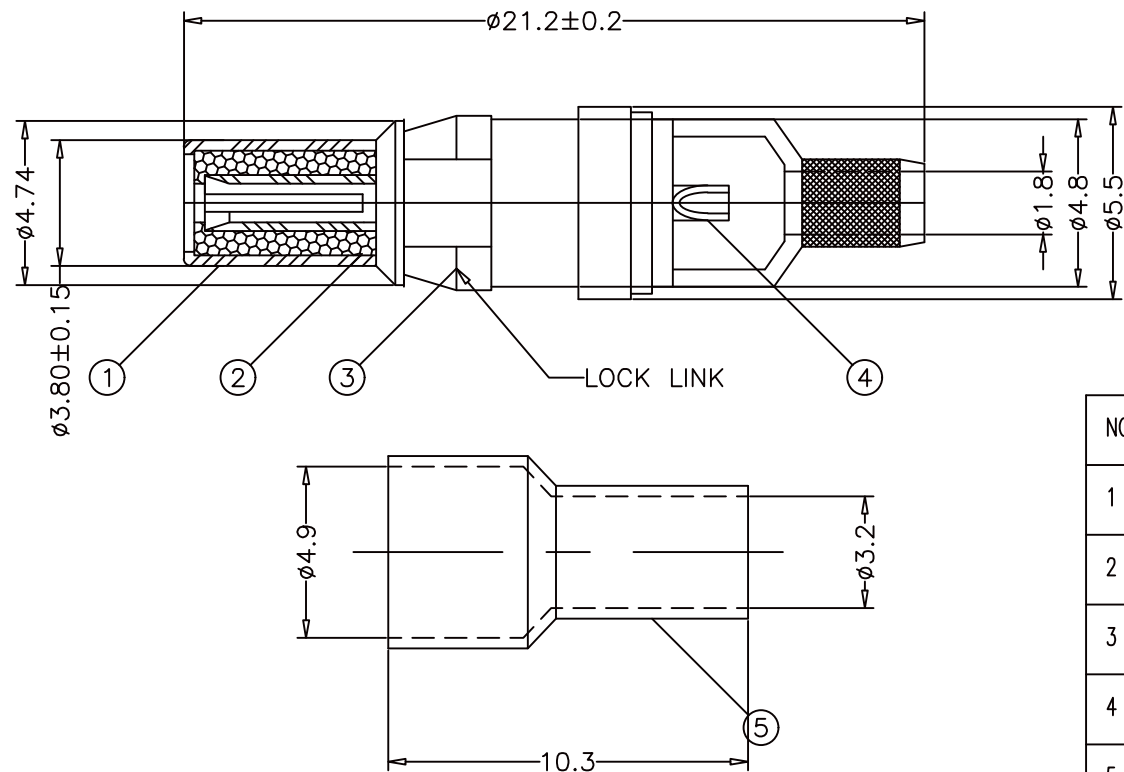

NO.	DESCRIPTION	MATERIAL	FINISH OR OTHER
1	Body	Brass	Gold flash
2	INSULATOR	TEFLON	UL 94V-0 COLOR WHITE
3	LOCK LINK	Brass	Nickel plated
4	CENTER CONTACT	Brass	Gold flash
5	SLEEVE	Brass	Gold flash OVER 1.27um (50u") Nickel

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DXC-M-50-LF

SERIES

LEADFREE

50 OHM

MALE TERMINAL

DESCRIPTION: Coaxial Male Contact (Straight Solder Cup Type)