
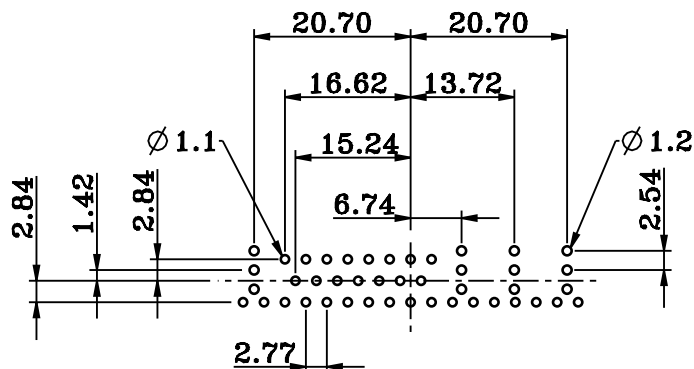



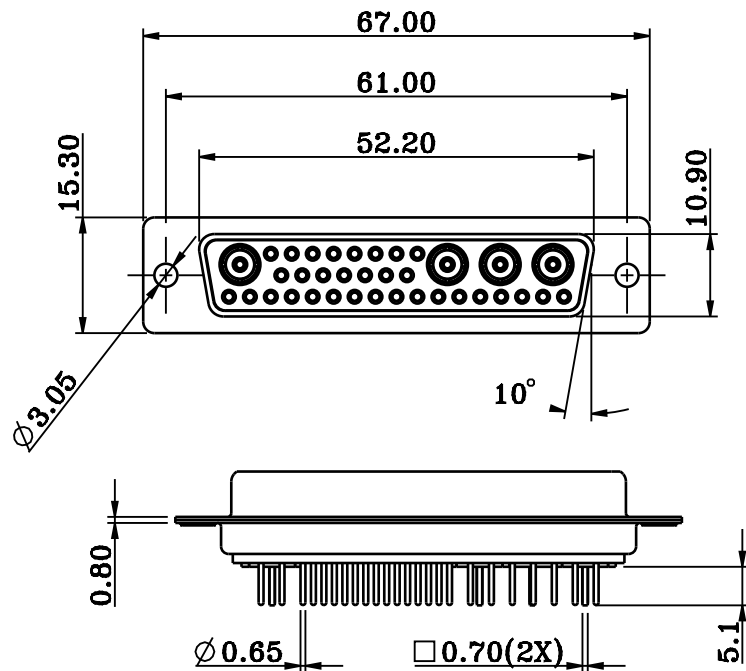

P.C.B LAYOUT

MATERIALS AND FINISH

SHELL: STEEL MATERIAL, FRONT SHELL TIN FINISHED
BACK SHELL TIN FINISHED
DIMPLES ON PLUG ONLY

INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED,
UL 94V-0 RATED, BLACK COLOR

SIGNAL CONTACT: PRECISION MACHINED COPPER ALLOY
FULL GOLD FLASH

COAXIAL CONTACT: PRECISION MACHINED COPPER ALLOY
FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS

COAXIAL CONTACT IMPEDANCE : 50Ω

COAXIAL CONTACT RESISTANCE : 2.7 mΩ MAX.

SIGNAL CONTACT CURRENT RATING : 5.0 A

SIGNAL CONTACT RESISTANCE : 10 mΩ MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.

INSULATION RESISTANCE : 5GΩ MIN.

TEMPERATURE RATING : -55°C ~ +125°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

DXD-S50-36W4-LF

SERIES

LEADFREE

36W4

50 OHM

FEMALE

DESCRIPTION: