
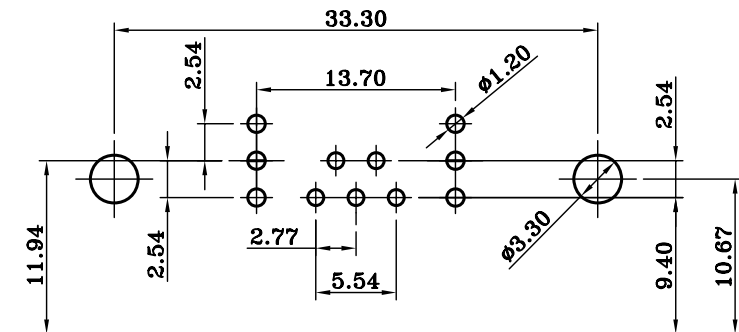


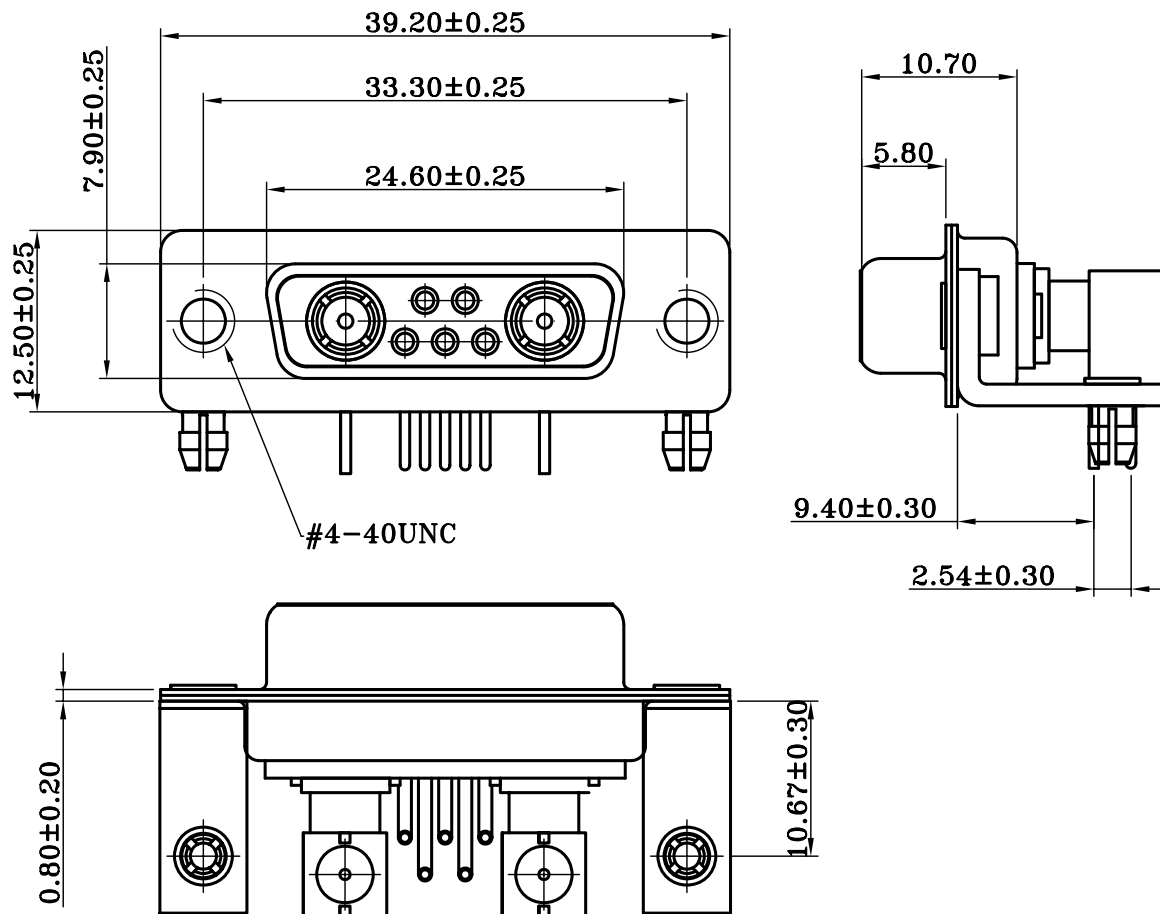

PCB LAYOUT

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT SHELL TIN FINISHED
BACK SHELL TIN FINISHED
DIMPLES ON PLUG ONLY

INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED,
UL 94V-0 RATED, BLACK COLOR

SIGNAL CONTACT : COPPER ALLOY, FULL GOLD FLASH

COAXIAL CONTACT : COPPER ALLOY, 15u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

SIGNAL CONTACT CURRENT RATING : 7.5 AMPS

SIGNAL CONTACT RESISTANCE : 2.7 mΩ MAX.

COAXIAL CONTACT IMPEDANCE : 50 Ω

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE

INSULATION RESISTANCE : 10⁹ MΩ MIN.

TEMPERATURE RATING : -55°C ~ +125°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±


.X, ±

.XX, ±

.XXX, ±

ANG, ±

PPOJECTION



ORDER INFORMATION

DXR-S50ZN-07W2-LF
SERIES | 07W2 | LEADFREE
NUT
CLIP
50 OHM
FEMALE

DESCRIPTION: