
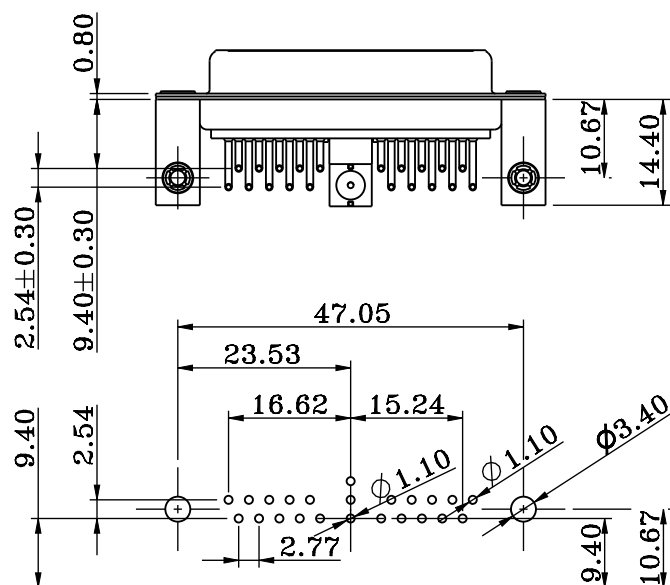


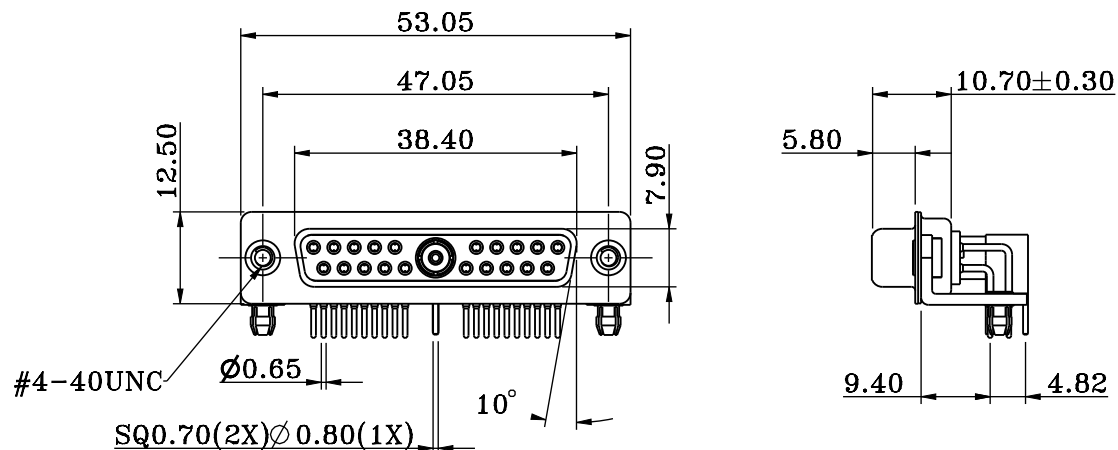

P.C.B. LAYOUT

MATERIALS AND FINISH

SHELL: STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
BACK SHELL NICKEL FINISHED
DIMPLES ON PLUG ONLY

INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED
UL 94V-0 RATED, BLACK COLOR

SIGNAL CONTACT: COPPER ALLOY, FULL GOLD FLASH
COAXIAL CONTACT: COPPER AOLLY, FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS

COAXIAL CONTACT IMPEDANCE : 50Ω
COAXIAL CONTACT RESISTANCE : 2.7 mΩ MAX.
SIGNAL CONTACT CURRENT RATING : 5.0 A
SIGNAL CONTACT RESISTANCE : 10 mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE
INSULATION RESISTANCE : 5GΩ MIN.
TEMPERATURE RATING : -55°C ~ +125°C

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 5°

ORDER INFORMATION

DXR-S50ZN-21W1-LF
SERIES NUT CLIP 50 OHM FEMALE
21W1 LEADFREE

DESCRIPTION: