
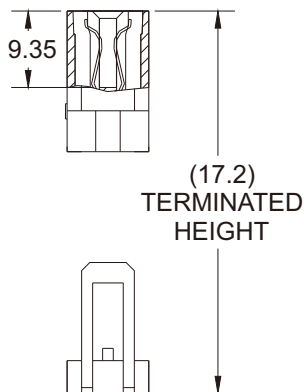
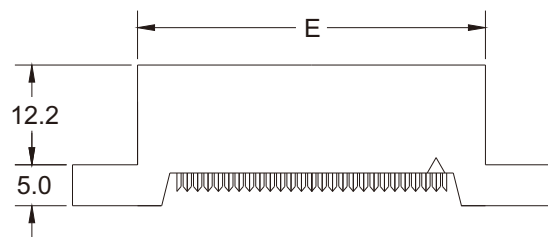


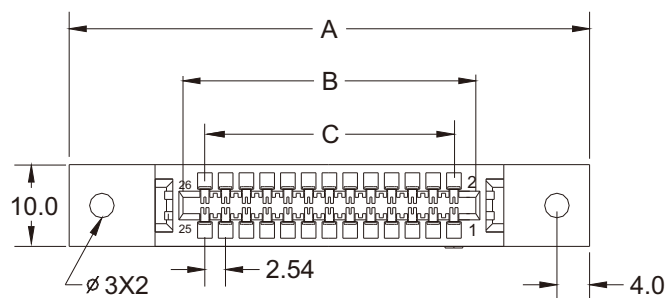

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze or Brass

Electrical

Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

Terminated with 1.27mm pitch flat ribbon cable.

POSITION	A	B	C		E
10	43.06	15.50	10.16		22.36
14	48.14	20.58	15.24		27.44
16	50.68	23.12	17.78		29.98
20	55.76	28.20	22.86		35.06
26	63.38	35.82	30.48		42.68
34	73.54	45.98	40.64		52.84
40	81.16	53.60	48.26		60.46
50	93.86	66.30	60.96		73.16
60	106.56	79.00	73.66		85.86
62	109.10	81.54	76.20		88.40
64	111.64	84.08	78.74		90.94

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

E-C2FE-xx-LF
SERIES | LEADFREE
10~64WAY
FULL EAR
TWO TYPE

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com