
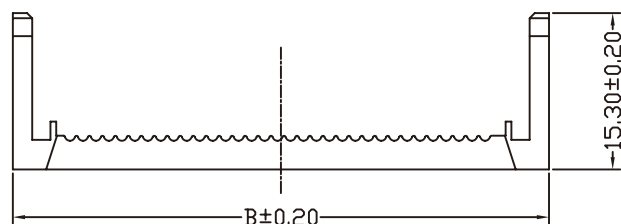
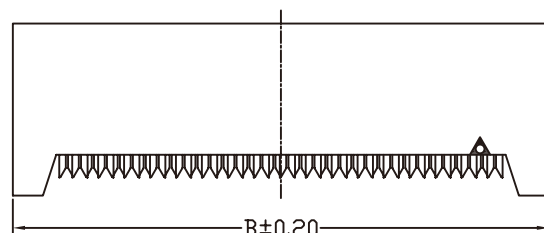
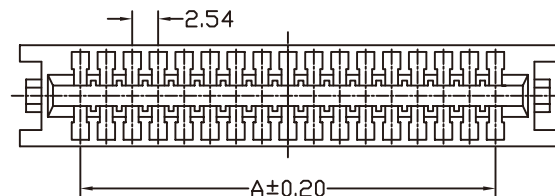


## ▼ CE PITCH 2.54MM I.D.C. CARD EDGE CONNECTOR FOR PITCH 1.27MM CENTER FLAT RIBBON CABLE

### MATERIAL & FINISH

\*INSULATOR: PBT+GLASS FIBER UL 94V-0

\*CONTACT: BRASS

\*FINISH: GOLD-PLATED OVER NICKEL  
SPECIFICATIONS

\*CURRENT RATING: 1A AC,DC

\*VOLTAGE RATING: 250V AC,DC

\*TEMPERATURE RANGE: -44°C TO +105°C

\*CONTACT RESISTANCE: 20MΩ MAX

\*INSULATION RESISTANCE: 1,000MΩ MIN

\*WITHSTANDING VOLTAGE: 500V AC/MIN

### DIMENSIONS:MM

| PART NO | DIM A | DIM B |
|---------|-------|-------|
| E-C3-10 | 10.16 | 22.03 |
| E-C3-14 | 15.24 | 27.10 |
| E-C3-16 | 17.78 | 29.60 |
| E-C3-20 | 22.86 | 34.80 |
| E-C3-26 | 30.48 | 42.40 |
| E-C3-34 | 40.64 | 52.60 |
| E-C3-40 | 48.26 | 60.22 |
| E-C3-44 | 53.34 | 65.30 |

| PART NO | DIM A | DIM B |
|---------|-------|-------|
| E-C3-50 | 60.96 | 72.90 |
| E-C3-56 | 68.58 | 80.54 |
| E-C3-60 | 73.66 | 85.43 |
| E-C3-64 | 78.74 | 90.51 |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ±

PPOJECTION



### ORDER INFORMATION

E-C3-xxLF  
SERIES | LEADFREE  
10~64 WAY  
THREE TYPE

DESCRIPTION: