
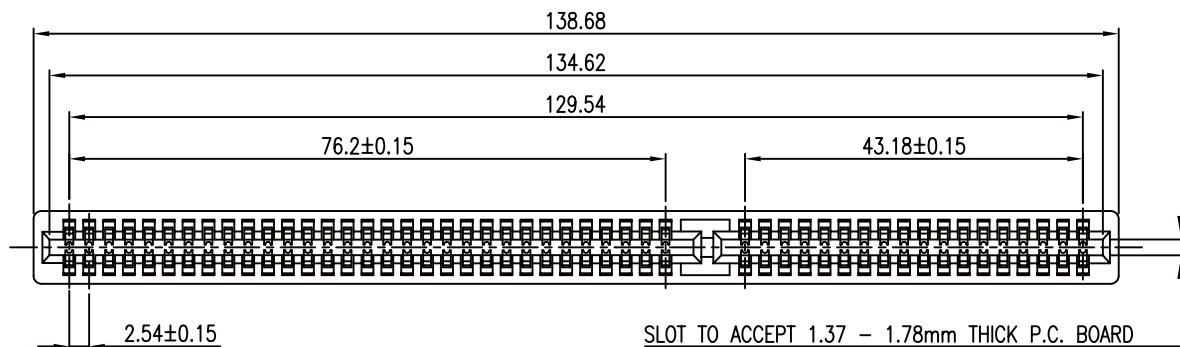


MATERIAL
INSULATOR: GLASS-REINFORCED THERMOPLASTIC (PBT),
UL94V-0 RATED.
CONTACT: COPPER ALLOY
PLATING: MATING AREA- FLASH GOLD OVER NICKEL.
SOLDER AREA- TIN/LEAD OVER NICKEL.

ELECTRICAL
DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VAC RMS.
CURRENT RATING: 3 AMP.
INSULATION RESISTANCE: 5,000 MEG. OHMS MIN. AT 500 VDC.
CONTACT RESISTANCE: 20 MILLI OHMS MAX.

MECHANICAL
INSERTION FORCE: 340 GRAMS MAX PER CONTACT PAIR.
WITHDRAWAL FORCE: 28 GRAMS MIN PER CONTACT PAIR

ENVIRONMENTAL
TEMPERATURE RANGE: -55° TO +105°.

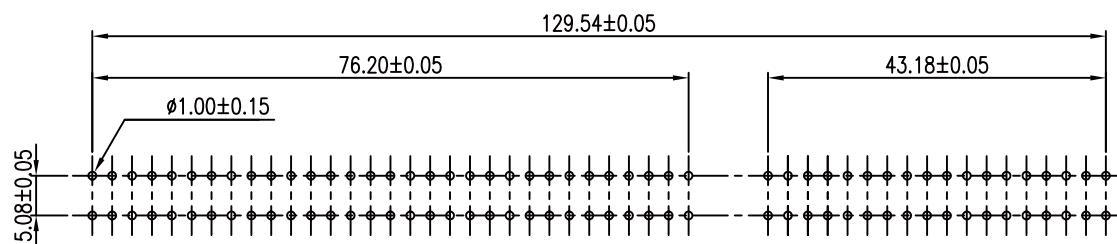

RECOMMENDED PCB LAYOUT

△ KINKED POSITION ARE #A2, #A3, #A23, #A24, #A27, #A28, #C17 & #C18
AND #B2, #B3, #B23, #B24, #B27, #B28, #D17 & #D18.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

E-D-098-LF
SERIES LEADFREE
98 WAY
DIP 180°

DESCRIPTION: 2.54 SLOT DIP TYPE 98 PIN