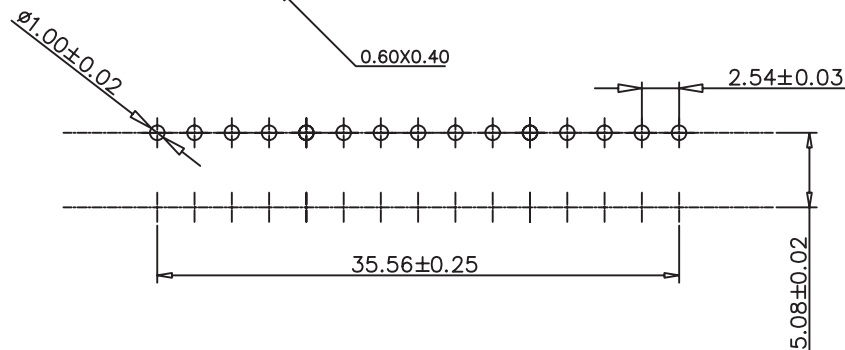
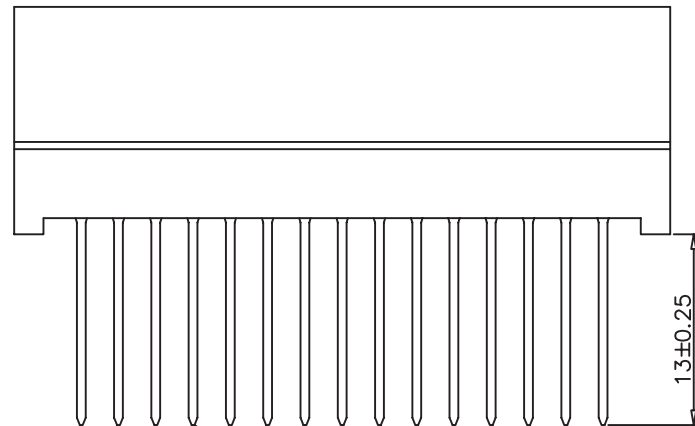
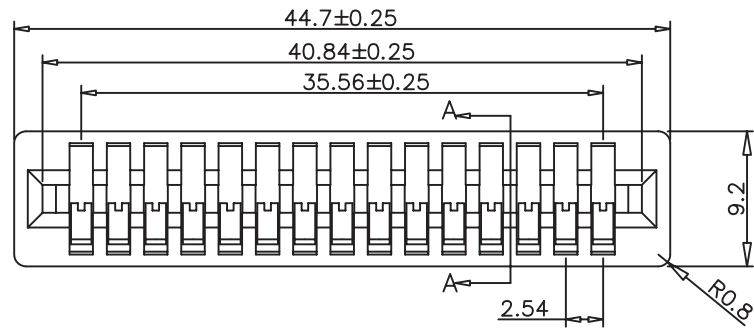


FEATURE:
INSULATOR
Housing: Nylon-6T UL94V-0
CONTACT
Phosphor Bronze selective gold plating
over nickel

SPECIFICATION:
Current Rating : 3 amperes
Contact Resistance : 20 miniohms max.
Operation Temperature : -55°C to +105°C
Voltage Rating : 800 VAC 1 minute
Insulation Resistance : 5000 megaohms min.
Insertion Force : 412 grams max. per pair
Withdrawal Force : 32 grams min. per pair

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

E-DD13-1X15-LF
SERIES DIP 13mm 15 WAY LEADFREE
DIP 180°

DESCRIPTION: EDGE CONNECTOR 2.54mm PITCH WITHOUT MOUNTING EARS