
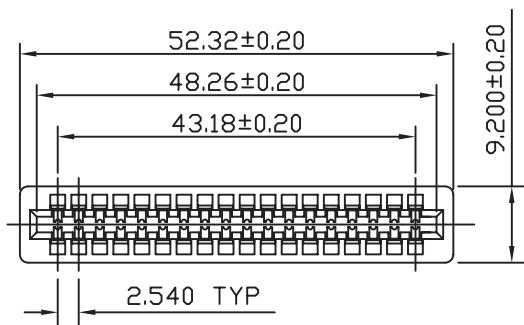
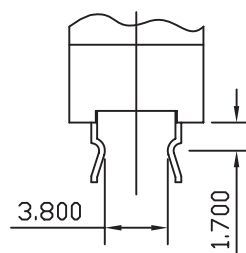


RECOMMENDED PCB LAYOUT

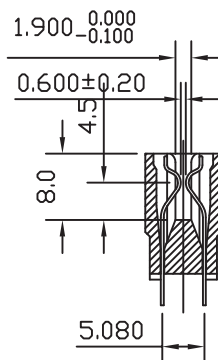

DETAIL OF KINKED

MATERIAL

INSULATOR: GLASS-REINFORCED THERMOPLASTIC (PBT),
UL94V-0 RATED.

CONTACT: COPPER ALLOY.

PLATING: CONTACT AREA- SELECT GOLD PLATED OVER NICKEL.
SOLDER AREA- TIN OR TIN/LEAD OVER NICKEL.

ELECTRICAL

DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VAC RMS.

CURRENT RATING: 3 AMP.

INSULATION RESISTANCE: 5,000 MEG. OHMS MIN. AT 500 VDC.

CONTACT RESISTANCE: 20 MILLI OHMS MAX.

MECHANICAL

INSERTION FORCE: 340 GRAMS MAX PER CONTACT PAIR.

WITHDRAWAL FORCE: 28 GRAMS MIN PER CONTACT PAIR.

ENVIRONMENTAL

TEMPERATURE RANGE: -55° TO +85°.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

E-DK-036-LF
SERIES KINK 36 WAY LEADFREE
DIP 180°

DESCRIPTION: CARDEDGE SLOT 36 P, 2.54mm PITCH