



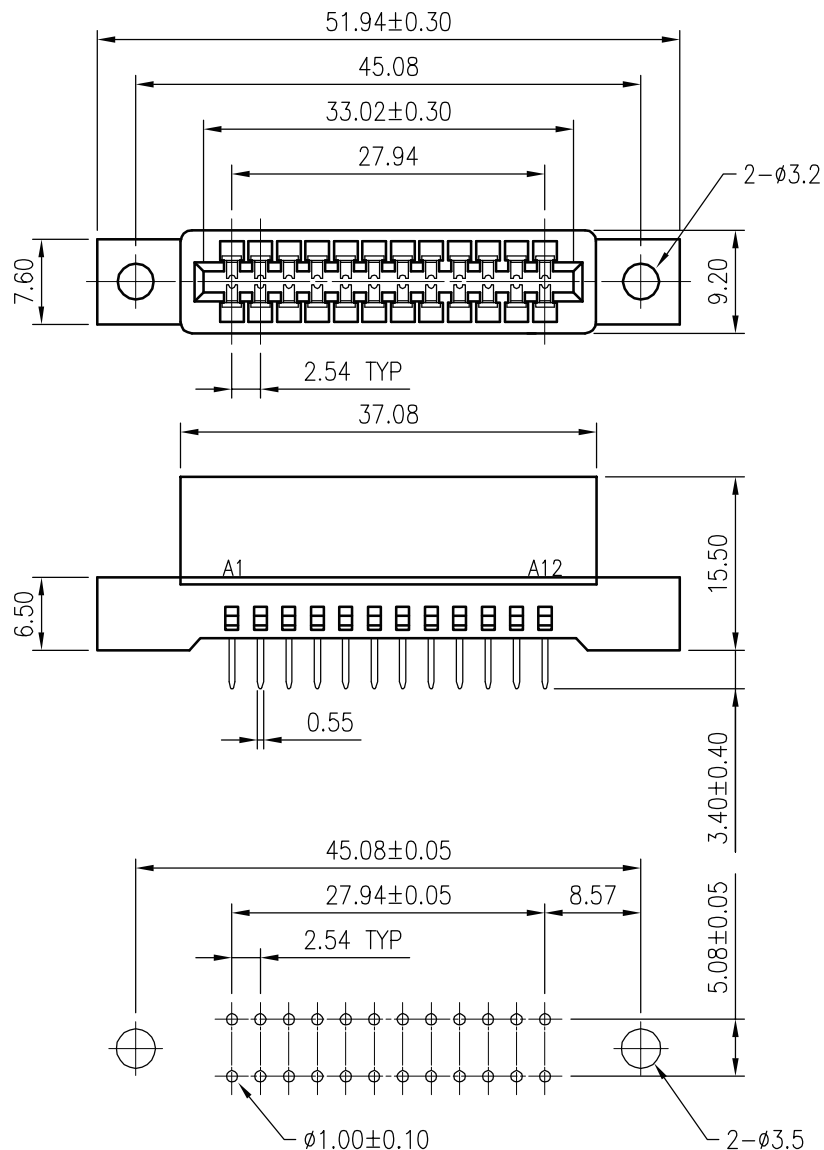

RECOMMENDED PCB LAYOUT

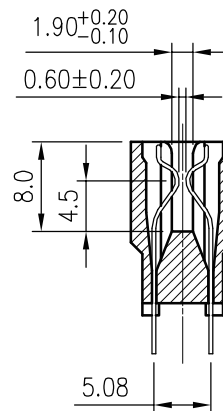

MATERIAL

INSULATOR: GLASS-REINFORCED THERMOPLASTIC (PBT),
UL94V-0 RATED.
CONTACT: COPPER ALLOY.
PLATING: MATING AREA- SELECT GOLD OVER NICKEL.
SOLDER AREA-TIN OR TIN/LEAD OVER NICKEL.

ELECTRICAL

DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VAC RMS.
CURRENT RATING: 3 AMP.
INSULATION RESISTANCE: 5,000 MEG. OHMS MIN. AT 500 VDC.
CONTACT RESISTANCE: 20 MILLI OHMS MAX.

MECHANICAL

INSERTION FORCE: 340 GRAMS MAX PER CONTACT PAIR.
WITHDRAWAL FORCE: 28 GRAMS MIN PER CONTACT PAIR.

ENVIRONMENTAL

TEMPERATURE RANGE: -55° TO $+85^{\circ}$.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

E-DLE-024-LF
SERIES | LEADFREE
024 WAY
LOW EARS
DIP 180°

DESCRIPTION: 2.54mm PITCH WITH EAR CARDEDGE SLOT 24P