
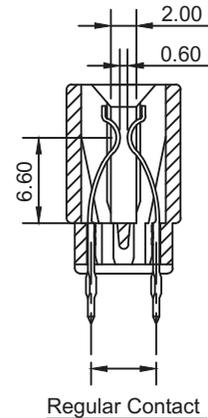


**FEATURE**

Insulator Material : PBT UL94V-0  
 Contact Material : Phosphor Bronze  
 Plating : Selective Gold Plating Over Nickel On Contact Point  
 100μ" Tin Plating On Tail Section  
 50μ" Nickel Underplating

**SPECIFICATION**

Current Rating : 2 Ampere  
 Contact Resistance : 10 milliohms maximum  
 Insulation Resistance : 5000 megohms minimum  
 Dielectric Withstanding Voltage : 1200VAC rms at Sea Level Between Adjacent Contacts  
 Operation Temperature Range : -55°C to +105°C

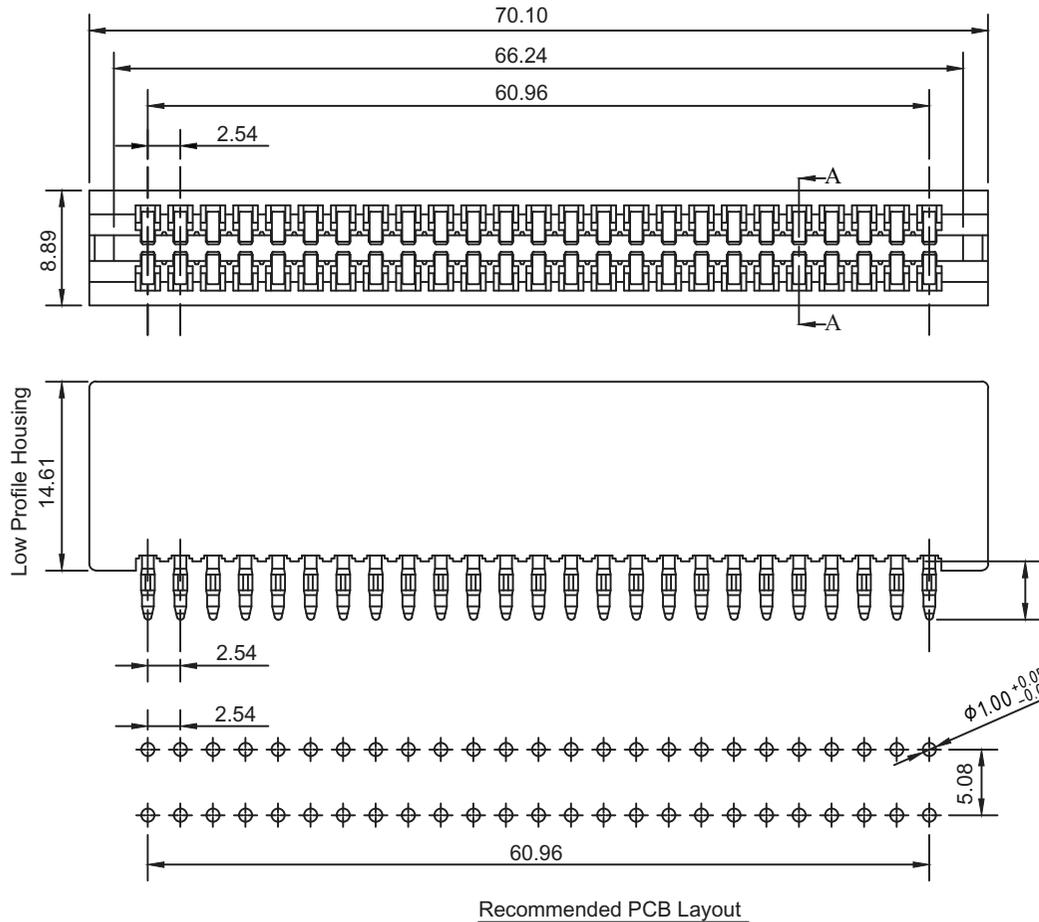

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.38

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ±

ANG ±

照片框

**ORDER INFORMATION**

E-P-050-LF  
 SERIES | LEADFREE  
 50 WAY  
 PRESS FIT

煜倫股份有限公司

www.morethanall.com

SIZE A4

PPOJECTION

DESCRIPTION: (Low Profile Insulator Press-Fit Type)