
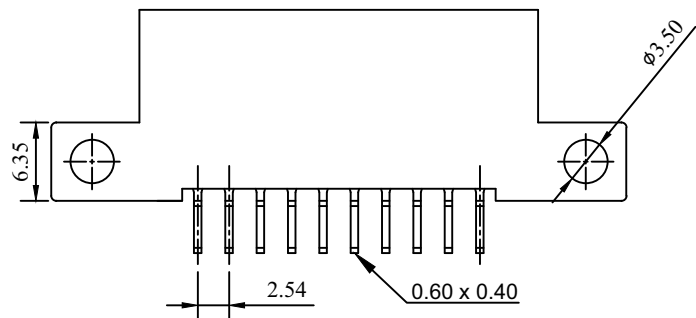
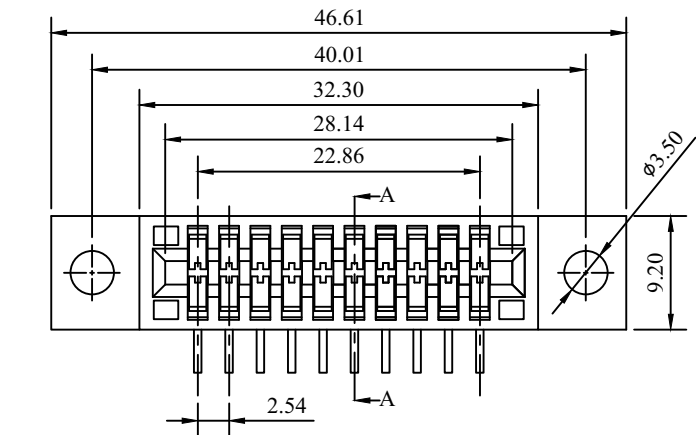


RECOMMENDED PCB LAYOUT

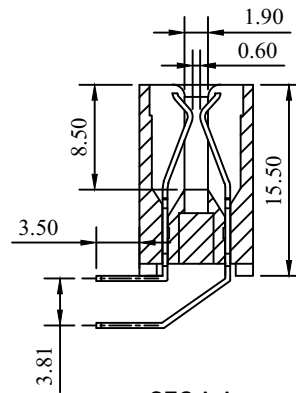

SEC A-A

FEATURE

Insulator Material : PBT UL94V-0

Contact Material : Phosphor Bronze

Plating : Selective Gold Plating Over Nickel On Contact Point

100μ" Tin Plating On Tail Section

50μ" Nickel Underplating

SPECIFICATION

Current Rating : 3 Ampere

Contact Resistance : 20 milliohms maximum

Insulation Resistance : 5000 megohms minimum

Voltage Rating : 800 VAC 1 minute

Operation Temperature Range : -55°C to +105°C

Insertion Force : 412 grams max. per pair

Withdrawal Force : 32 grams min. per pair

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.38

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

E-RLE-020-LF
 SERIES | LEADFREE
 | 020WAY
 | LOW EARS
 | DIP 90°

DESCRIPTION: (Pitch 2.54 mm Right Angle Type Low Mounting Ear)

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com