

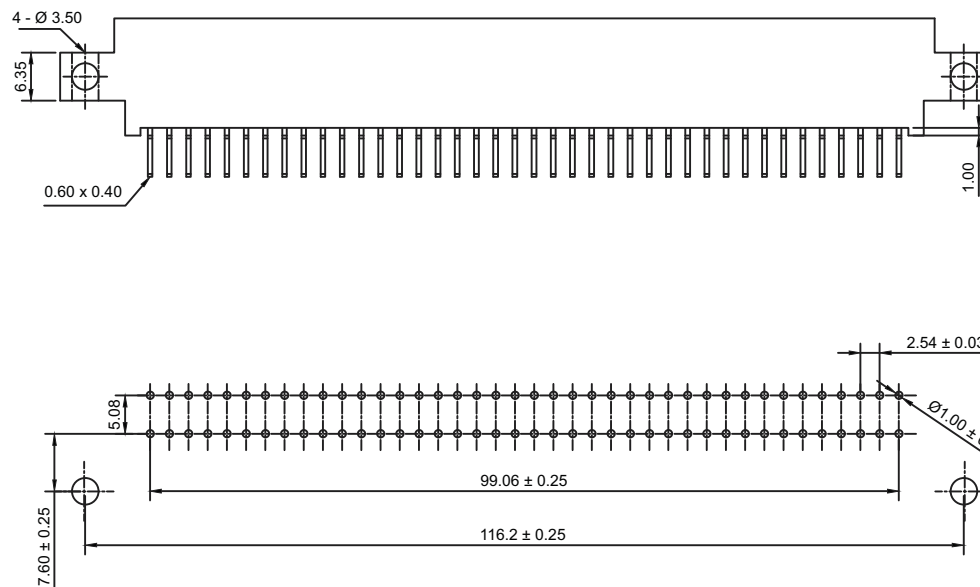


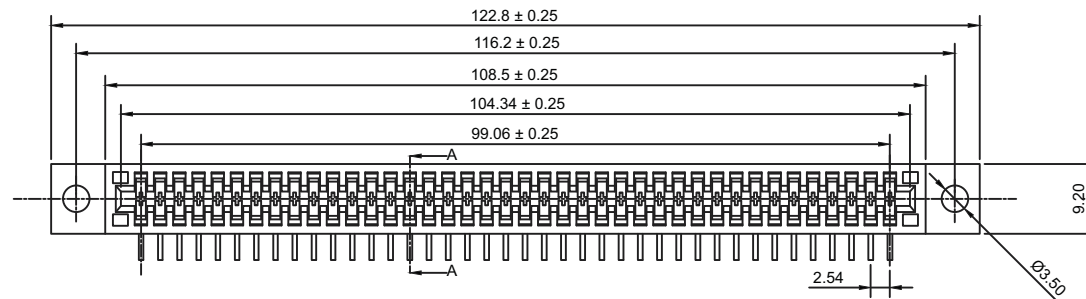

PCB Layout

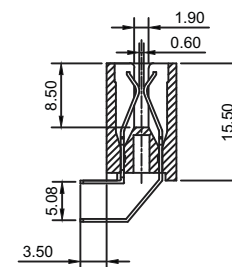

SEC A - A

FEATURE :
Insulator : Glass Filled PBT UL94V-0
Contact : Phosphor Bronze
Selective Gold Plating Over Nickel

SPECIFICATION :
Current Rating : 3 Amperes
Contact Resistance : 20 miniohms Max.
Operation Temperature : -55°C to + 105°C
Voltage Rating : 800 VAC 1 minute
Insulation Resistance : 5000 megaohms Min.
Insertion Force : 412 grams Max. Per Pair
Withdrawal Force : 32 grams Min. Per Pair

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

E-RME-080-LF
SERIES
LEADFREE
80 WAY
MIDDLE EARS
DIP 90°

DESCRIPTION: 2.54 mm Edge Card Connector R/A Type, Mid-High Mounting Ear