
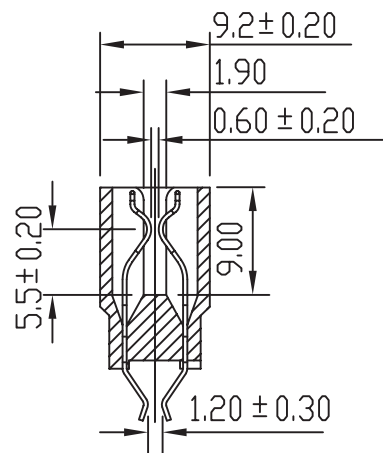
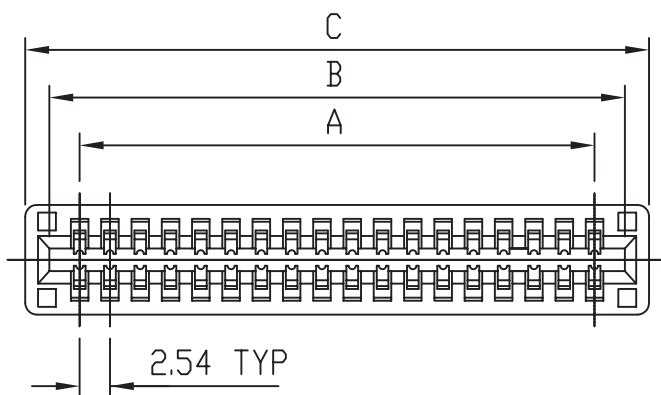


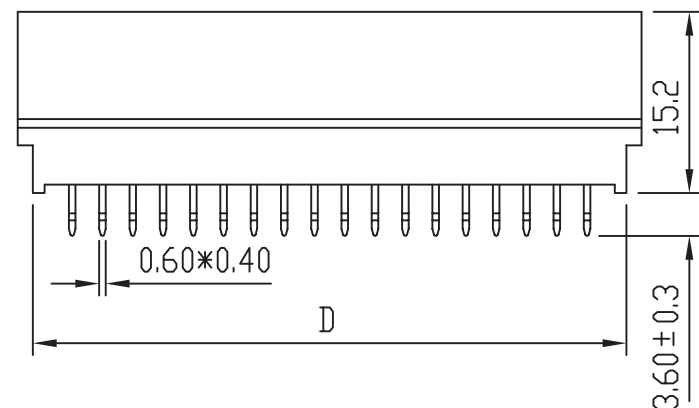

MATERIAL

- Insulator: Glass-Fiber P.B.T(UL94V-0)
- Contact: Phosphor Bronze (P) or Brass (B)
- Plating: Gold Plating Over Nickel.

SPECIFICATIONS

- Insulation Resistance: 5000 Ω min at 500 VDC
- Dielectric Withstanding Voltage: 1000 V-AC/1 min
- Current Rating: 3A
- Contact Resistance: 20m Ω max
- Operating Temperature: -55 $^{\circ}$ C to 105 $^{\circ}$ C
- Insertion Force: 340g max per pair
- Withdrawal Force: 28g min per pair

DIMENSIONS

Circuits	A	B	C	D	Circuits	A	B	C	D
6	5.08	10.16	14.22	11.62	48	58.42	63.50	67.56	64.96
8	7.62	12.70	16.76	14.16	50	60.96	66.04	70.10	67.50
10	10.16	15.24	19.30	16.70	52	63.50	68.58	72.64	70.04
12	12.70	17.78	21.84	19.24	54	66.04	71.12	75.18	72.58
14	15.24	20.32	24.38	21.78	56	68.58	73.66	77.72	75.12
16	17.78	22.86	26.92	24.32	58	71.12	76.20	80.26	77.66
18	20.32	25.40	29.46	26.86	60	73.66	78.74	82.80	80.20
20	22.86	27.94	32.00	29.40	62	76.20	81.28	85.34	82.74
22	25.40	30.48	34.54	31.94	64	78.74	83.82	87.88	85.28
24	27.94	33.02	37.08	34.48	66	81.28	86.36	90.42	87.82
26	30.48	35.56	39.62	37.02	68	83.82	88.90	92.96	90.36
28	33.02	38.10	42.16	39.56	70	86.36	91.44	95.50	92.90
30	35.56	40.64	44.70	42.10	72	88.90	93.98	98.04	95.44
32	38.10	43.18	47.24	44.64	80	99.06	104.14	108.20	105.60
34	40.64	45.72	49.78	47.18	86	106.68	111.76	115.82	113.22
36	43.18	48.26	52.32	49.72	92	114.30	119.38	123.44	120.84
38	45.72	50.80	54.86	52.26	98	129.54	134.62	138.68	136.08
40	48.26	53.34	57.40	54.80	100	124.46	129.54	133.60	131.00
42	50.80	55.88	59.94	57.34	104	129.54	134.62	138.68	136.08
44	53.34	58.42	62.48	59.88	110	137.16	142.24	146.30	143.70
46	55.88	60.96	65.02	62.42	120	149.86	154.94	159.00	156.40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

E-Y-xxx-LF
SERIES | LEADFREE
006~120 WAY
Y TERMINAL

DESCRIPTION: 2.54 SLOT PCB STRADDLE TAIL