

NOTES

*Material:

Body: LCP, UL 94V-0 Rated. Color:Black

Contacts: Brass.

Plating: Gold Plating Over Nickel on Contact

Area; Tin Plating on Solder Tail

*Mechanical:

Insertion Force: 0.74N max per contact pair;

Withdrawal Force: 0.15N min per contact pair;

Contact Retention Force: 3.92N min per contact;


*Electrical Specification

Contact Resistance : 30 Milliohms Max.

Current Resistance : 1.7 Ampere

Insulation Resistance : 1000 Megohms Min, At 500V AC.

Operating Temperature : -40°C to +105°C

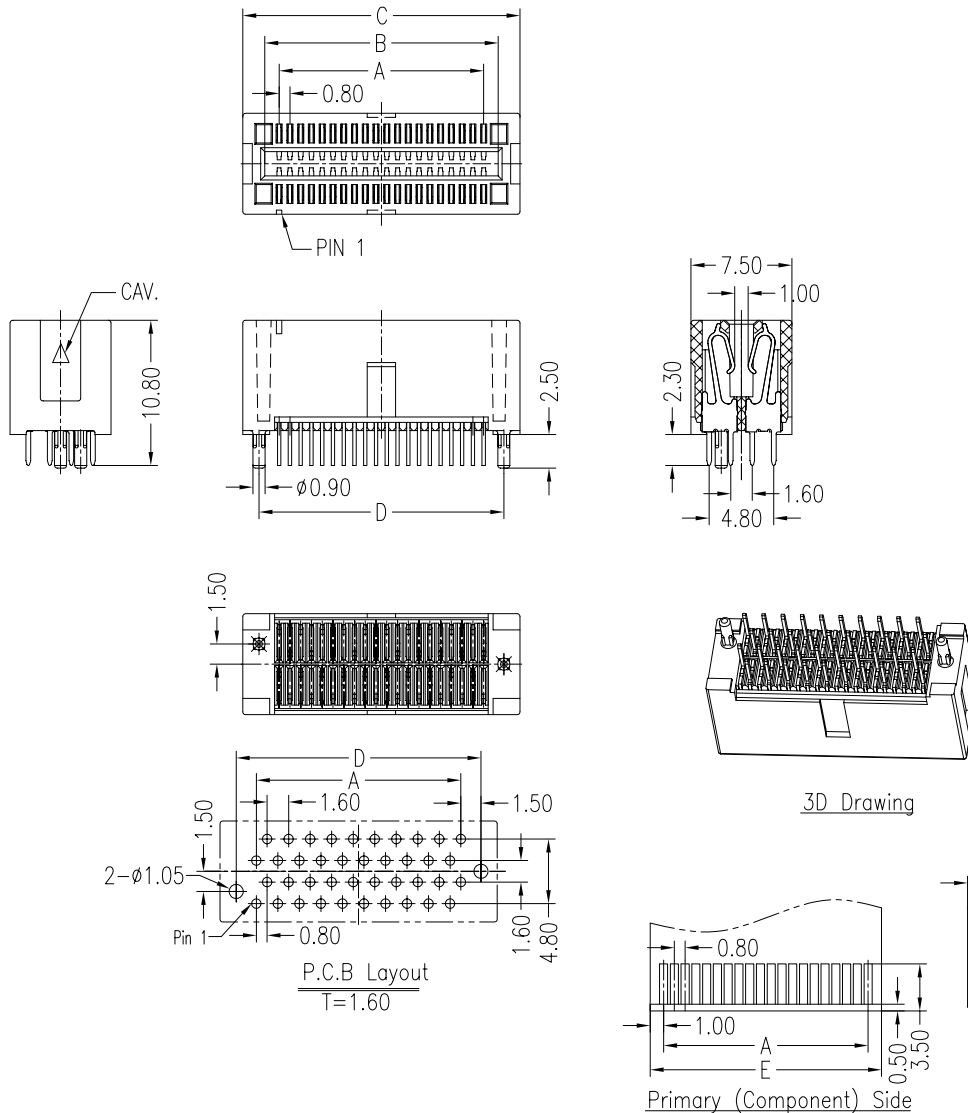

項目 PIN 數	DIM 'A'	DIM 'B'	DIM 'C'	DIM 'D'	DIM 'E'
40P	15.20	17.35	20.60	18.20	17.20
60P	23.20	25.35	28.60	26.20	25.20
70P	27.20	29.35	32.60	30.20	29.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG, ±

PPOJECTION

照片框

ORDER INFORMATION

E08-DP-xxx-LF
SERIES | LEADFREE
040.060.070WAY
POST
DIP 180°

DESCRIPTION: Edge Card Connector (DIP Type)