


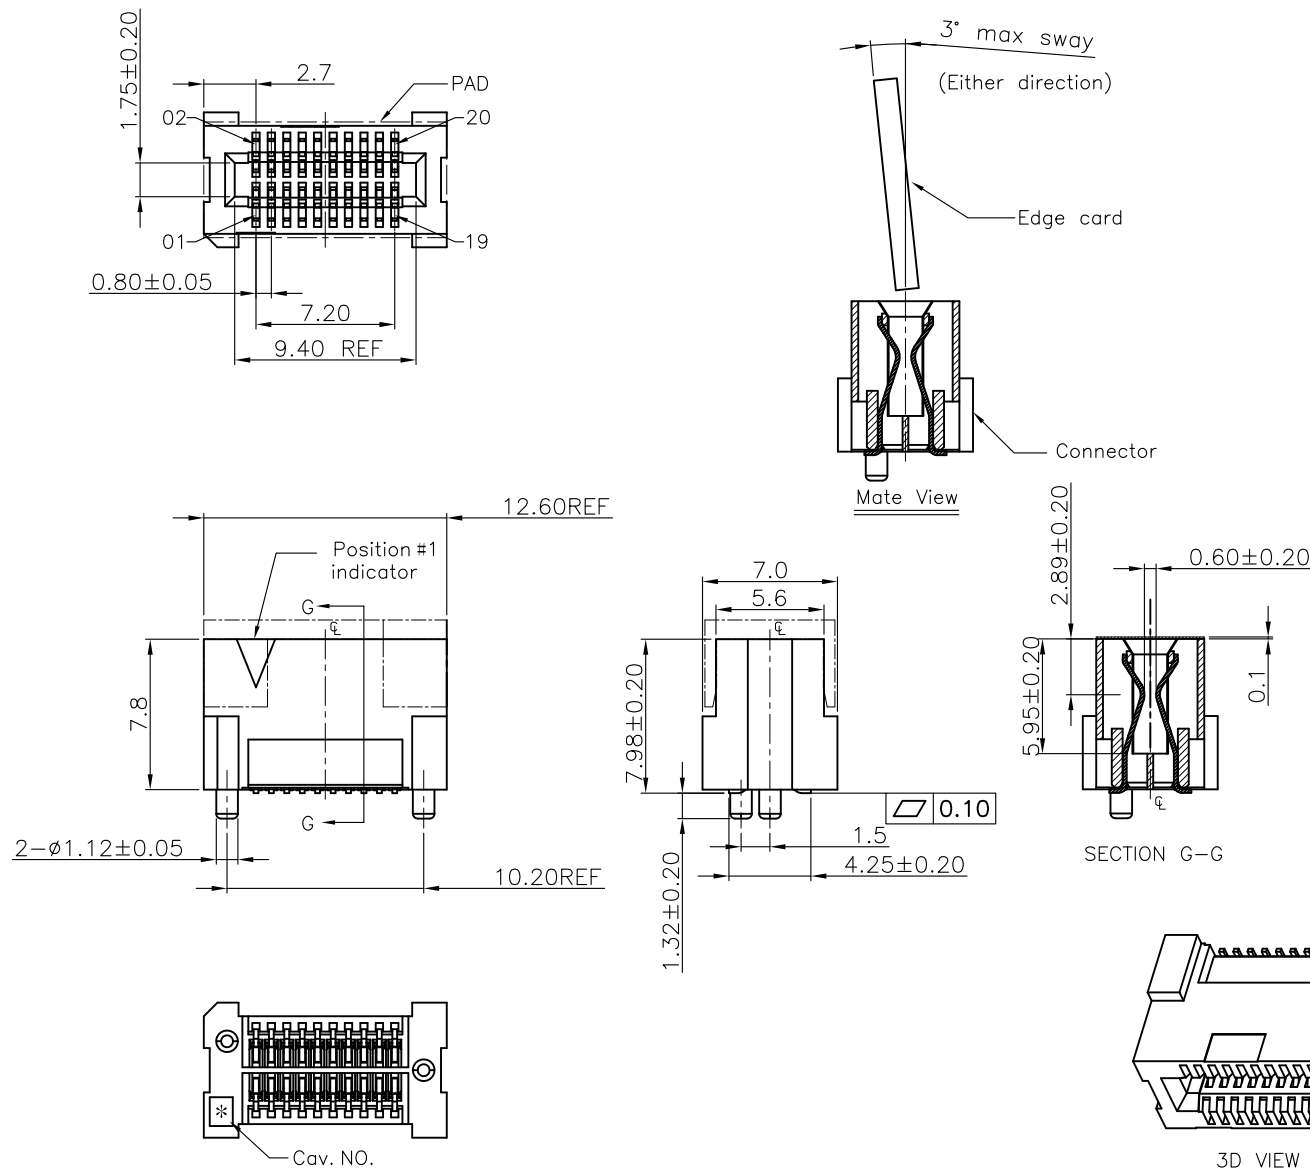

NOTES: (Unless otherwise specified)

1. Dimension shall be interpreted per ANSI Y14.5M-1994

2. Materials: Insulator material: LCP, UL 94V-0

Contact material: Copper Alloys

3. Current rating: 1.5 A.

4. Voltage rating: 250V AC.

5. Working temperature: -55°C~+125°C

6. Harmful material should be compliant to doc. "EI-0005" standards.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.20

.XX ± 0.10

.XXX ± 0.05

ANG ±


PPOJECTION

照片框

ORDER INFORMATION



E08-V8PCR-020-LF
SERIES REEL MYLAR POST WIDE 8.80mm
180°SMT
020 WAY
LEADFREE

DESCRIPTION: HIGH SPEED EDGE CARD FOR THICKNESS 1.20mm CARD CUSTOMER DRAWING

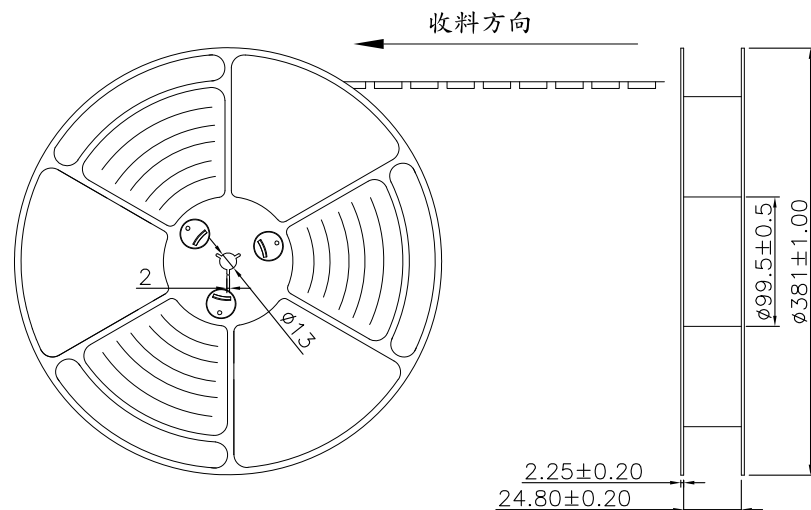

標籤黏貼處 (朝捲裝包材的小定位孔一側)

Location of label sticking (label at small positioning hole of the carrier tape side).

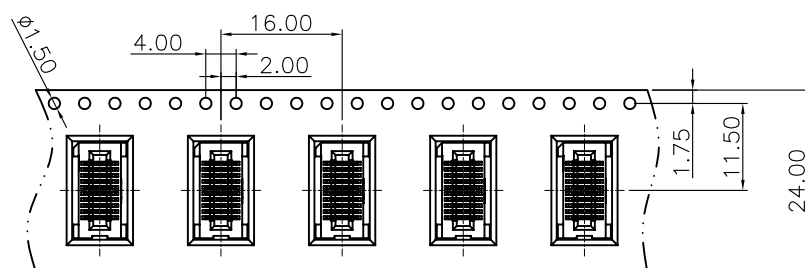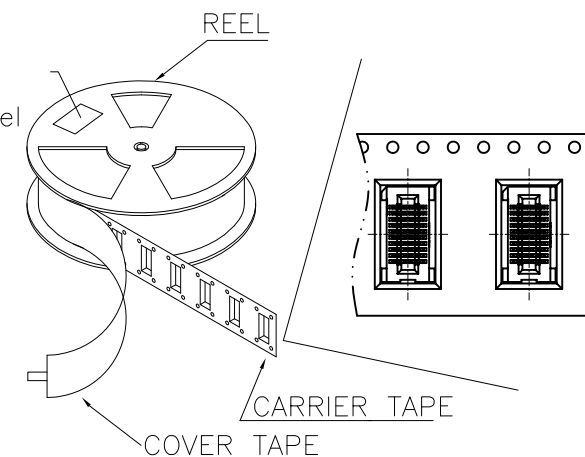

產品料號 (PRODUCT No.)	包裝容量 (PACKING CAPACITY)		
	PCS/REEL	REELS/CARTON	PCS/CARTON
E08-V8PCR-020	350	7	2450

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.20

.XX ± 0.10

.XXX ± 0.05

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION


E08-V8PCR-020-LF

SERIES REEL MYLAR POST WIDE 8.80mm

020 WAY LEADFREE

180°SMT

DESCRIPTION:

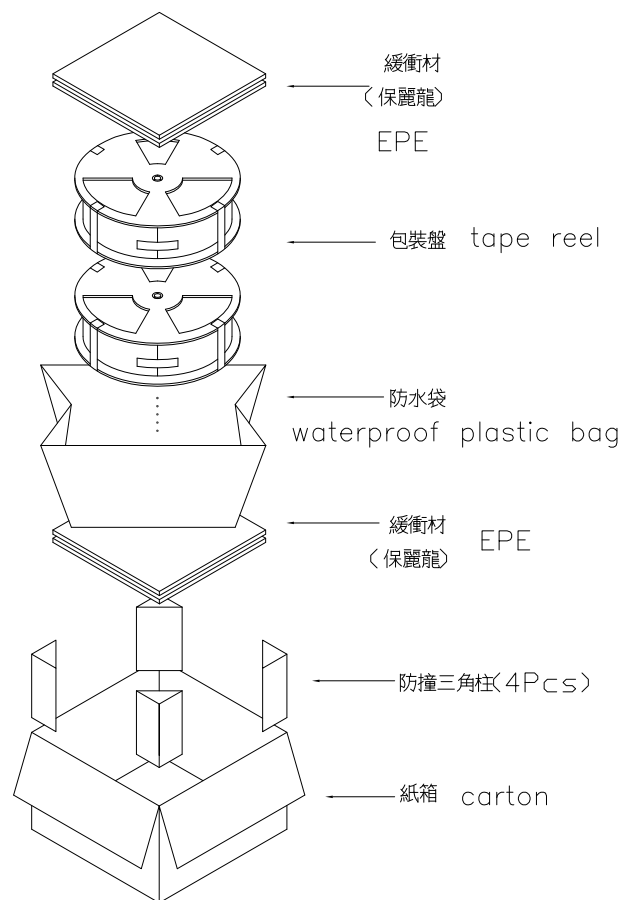

NOTES

1. 每捲包裝數量及每箱裝箱數量如上表格

Packing q'ty of each reel & carton as up table shown.

2. 以上膠帶覆蓋下包裝帶經包裝機熱熔包裝

Use cover tape to cover and hot melt machine to seal up.

3. 每個紙箱放2個珍珠棉

Every carton use 2pcs EPE.

4. 將裝滿產品的卷盤放入紙箱並以膠帶封口


Put reels in the carton and use adhesive tape to seal up.

5. 帶子引導長度

LEAD TAPE LENGTH

轉繞方向

PULL OUT DIRECTEON

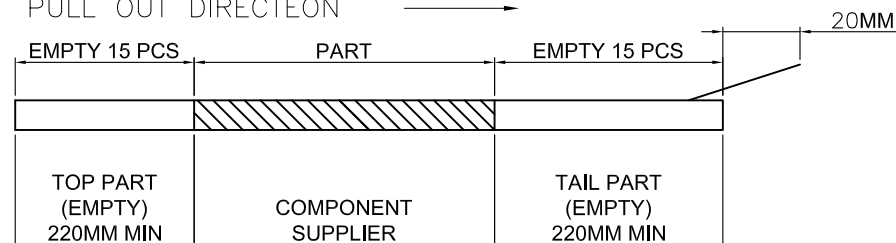

6. 上帶剝力為: 0.1~1.3

N(10.2gf~130gf)


PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2gf~130gf)

出貨運輸過程中一定注意:

THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:

卷帶在運輸過程中不能散開

PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

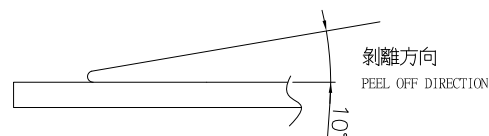

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ± 0.30
X, ± 0.20
.XX, ± 0.10
.XXX, ± 0.05
ANG $\pm$

照片框

ORDER INFORMATION

E08-V8PCR-020-LF
SERIES REEL MYLAR POST WIDE 8.80mm
180°SMT
020 WAY LEADFREE

DESCRIPTION: