
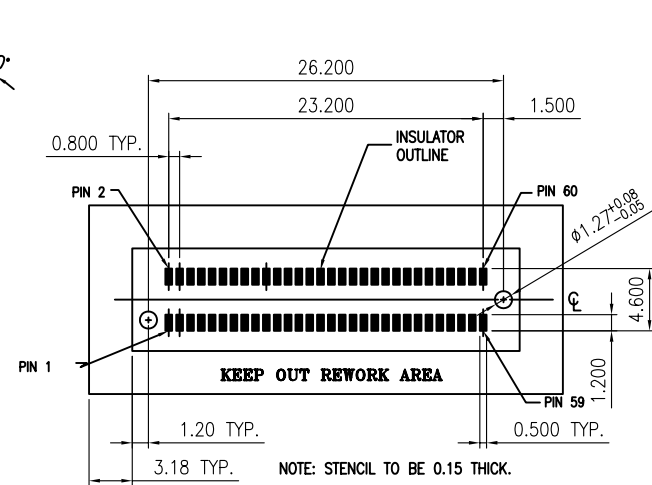
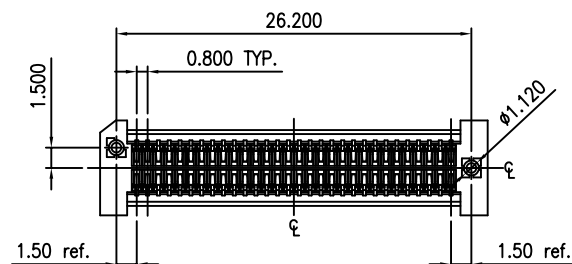


- NOTES:
1. UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES FOLLOW DRAWING COMMON STANDARD.
 2. MARKED  : CRITICAL DIMENSION.
MARKED  DIMENSIONS NEED BE MEASURED IN CPK
 3. ALL EXTERNALS SHALL BE IN ACCORDANCE WITH
SPEC WI-GA06~17 (品保檢驗通則)



MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE _____

SIZE A4

PJECTION 

TOLERANCES ARE


X. ±
.X ± 0.25
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

E08-V8PCR-060-LF
 SERIES REEL MYLAR 060 WAY LEADFREE
 180°SMT POST WIDE 8.80mm

DESCRIPTION: 0.8mm HIGH SPEED CARD EDGE 30 ROW FEMALE CONNECTOR, ASSEMBLY

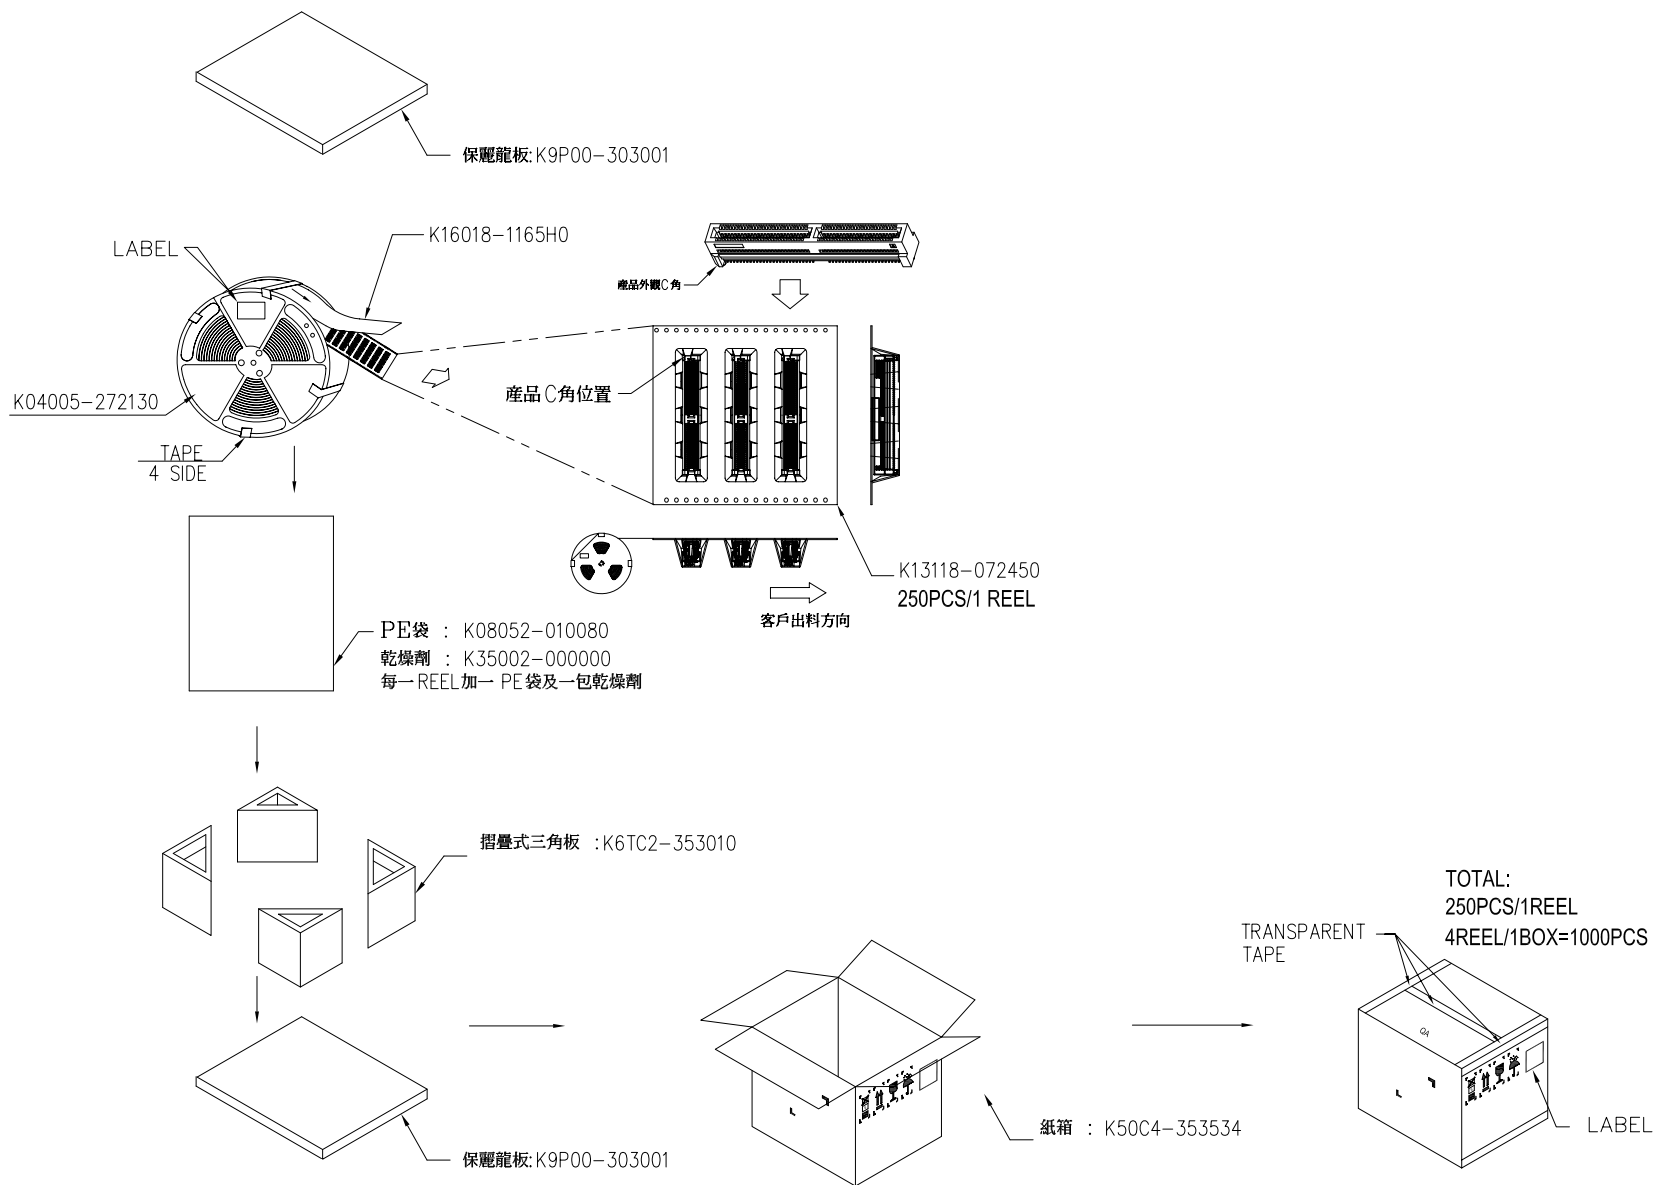

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

E08-V8PCR-060-LF
SERIES REEL MYLAR POST WIDE 8.80mm
180°SMT
060 WAY
LEADFREE

DESCRIPTION: 0.8mm HIGH SPEED CARD EDGE ROW FEMALE CONNECTOR