
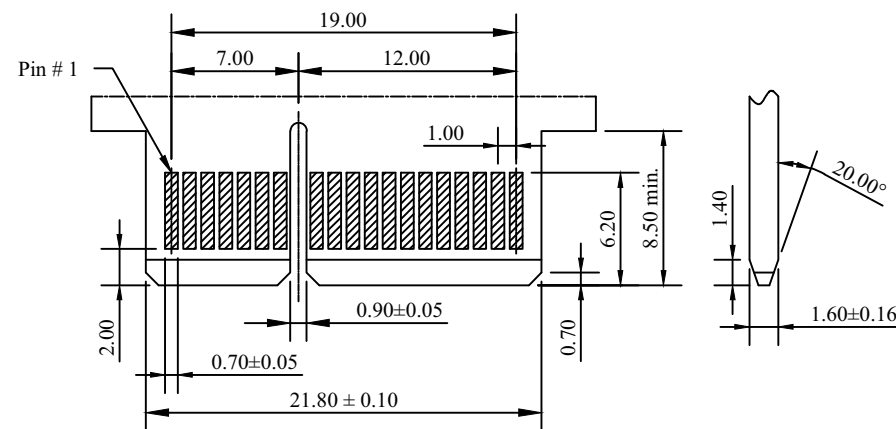
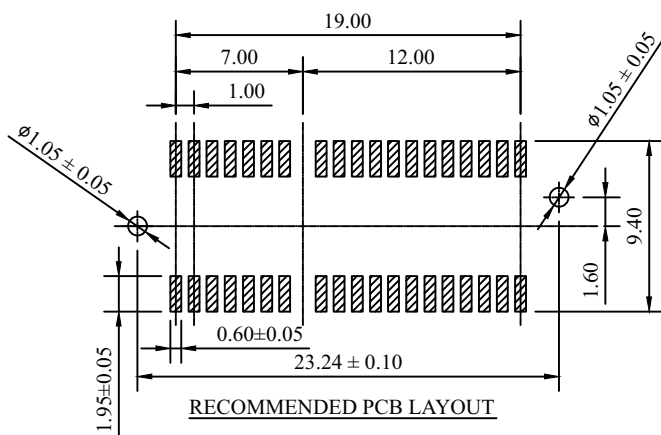


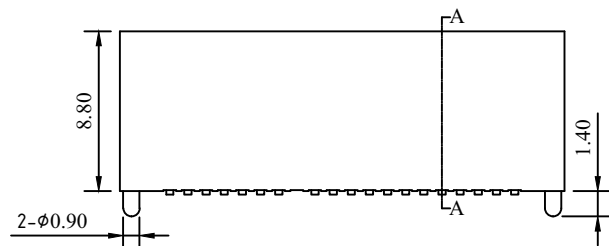
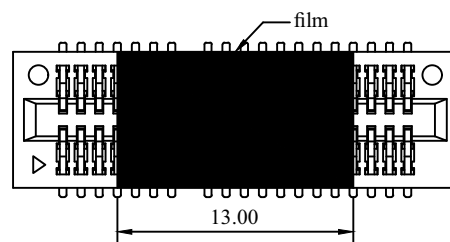


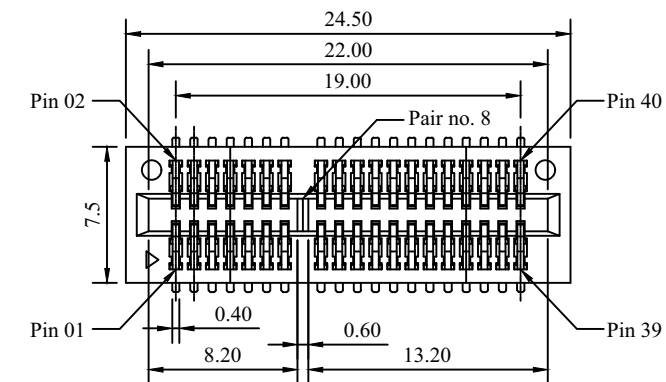

7000M SERIES (Pitch 1.00 mm SMT Type)

FEATURE

Insulator Material : LCP UL94V-0

Contact Material : Phosphor Bronze

Plating : Gold Flash Plating Over Contact Area

100μ" min. Matte Tin Plating On Solder Area

50μ" min. Nickel Underplating Overall

SPECIFICATION

Current Rating : 1.1 Ampere

Contact Resistance : 30 milliohms maximum

Insulation Resistance : 1000 megohms minimum

Voltage Rating : 500 VAC RMS 1 minute

Operation Temperature Range : -55°C to +105°C

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.10

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

E10B-VPC-040-LF

SERIES T T LEADFREE

40 WAY

MYLAR

POST

180°SMT

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com