
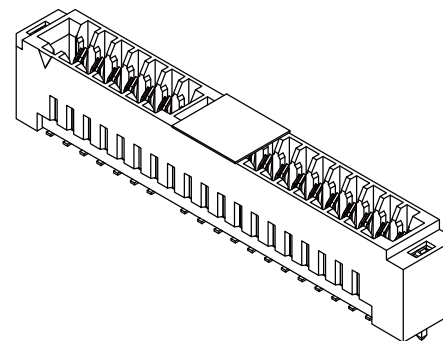


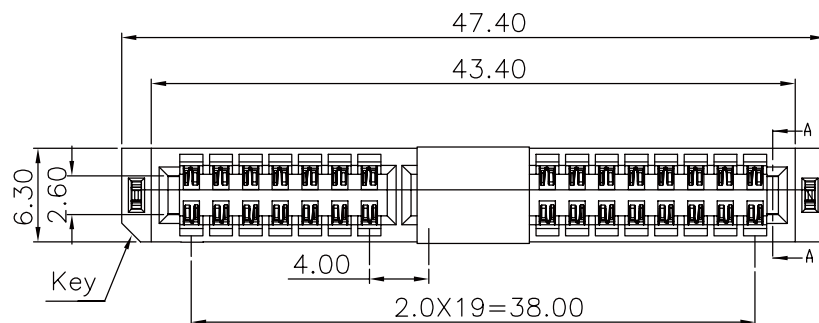

### Material:




Housing: High Temperature Plastic UL94V-0.  
Contacts: Copper Alloy.

### Electrical Characteristics:


Current Rating: 2.5 AMP.  
Dielectric Withstanding Voltage: AC 500V For 1 minute.  
Insulator Resistance: 5000M $\Omega$  min. at DC 500V.  
Contact Resistance: 5.8m $\Omega$  max. at DC 100mA.  
Operating Temperature: -55°C~+125°C.

### \*RoHS Compliant

Insertion Depth: 3.15mm.  
Mates With: 2.36 $\pm$ 0.05mm Thick Edge Card.

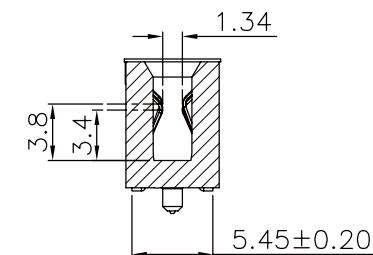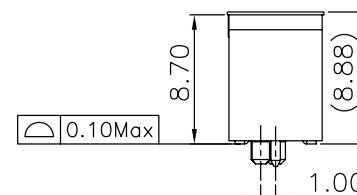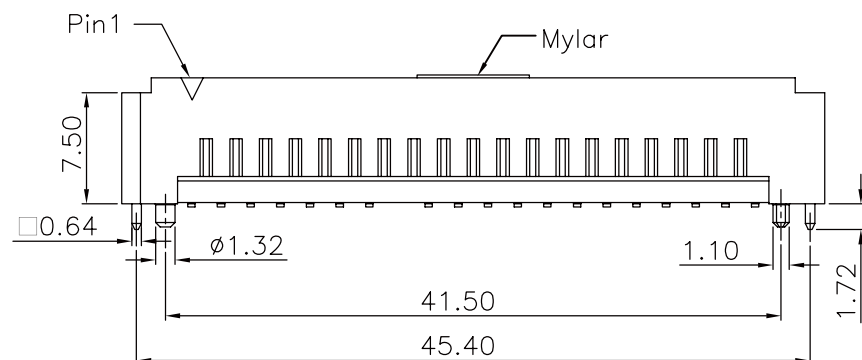

SECTION A-A

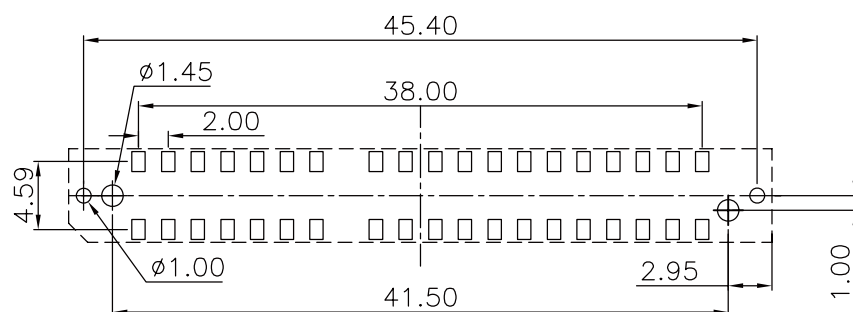

P.C. Board Layout  
(Tolerance  $\pm$ 0.05)

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X.  $\pm$  0.50

.X  $\pm$  0.25

.XX  $\pm$  0.15

.XXX  $\pm$

ANG  $\pm$

PPOJECTION

照片框

### ORDER INFORMATION

E2024-V87MPC-040-LF

SERIES 40 WAY LEADFREE

MYLAR POST

METAL FOOT

180°SMT WIDE 8.70mm

DESCRIPTION: 2.0mm (0.0787") Pitch SMD Type Edge Card Connector