



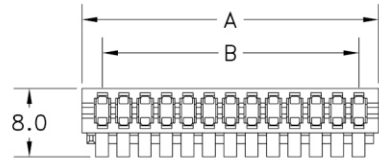


	1	2	3	4	5	6	7	8	9	0
J										
I										
H										
G										
F										
E										
D										
C										
B										
A										






POSITION	A	B
2	7.20	2.50
3	9.70	5.00
4	12.20	7.50
5	14.70	10.00
6	17.20	12.50
7	19.70	15.00
8	22.20	17.50
9	24.70	20.00
10	27.20	22.50
11	29.70	25.00
12	32.20	27.50
13	34.70	30.00
14	37.20	32.50
15	39.70	35.00
16	42.20	37.50
17	44.70	40.00
18	47.20	42.50
19	49.70	45.00
20	52.20	47.50

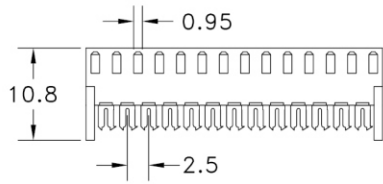

(10.8)
TERMINATED
HEIGHT

(TYPE A)

(TYPE B)



SPECIFICATIONS

Material

Insulator: PBT, glass reinforced, rated UL 94V-0

Contact: Phosphor Bronze

Electrical

Current Rating: 1 Amp

Contact Resistance: 30 mΩ max.

Insulation Resistance: 3000 MΩ min.

Dielectric Withstanding Voltage: 500V AC for 1 minute

Operating Temperature: -40℃ to +105℃

◆ Terminated with 2.5mm pitch flat ribbon cable.

E25-STx-xx-LF

LEADFREE

**A:CLOSED
B:OPEN**

RoHS Compliant



PART NO. E25-STx-xx	
DWG NO. E25-STx-xx	
FILE NO.	
UNIT / mm	SCALE 1 : 1

CHECKED BY CY
DRAWING BY
PROJECTION

TOLERANCES ARE
.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:				
AREA	REVISIONS	HK	DATE	

煜倫股份有限公司