


	Table 1				
Wire OD	1.6~2.0	1.2~1.6	1.0~1.2	0.8~1.0	0.6~0.8
Part # 20~22AWG					
Cover Color	Gray	Blue	Green		
Part # 24~26AWG					
Cover Color		Orange	Yellow	Red	
Part # 26~28AWG					
Cover Color					Violet

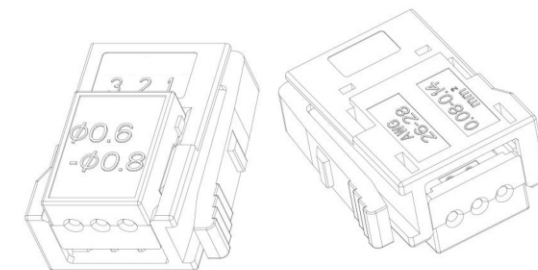

NOTE:

1.Physical

1.1 Insulation:

Material: Glass reinforced thermoplastic body & lower cover, transparent thermoplastic cover
Flammability: UL 94V-0

Color: Black body, cover-white & color (see Table 1)

1.2 Plating:

Underplating: 2.54 μ m [100 μ "] minimum Nickel

Wiping Area: 1 μ " minimum Gold with Lubricant

IDC: Nickel

1.3 Accommodation: Annealed Copper, high-strength Copper, or Copper Alloy. Bare, tinned, or tin overcoated, 20-26 AWG [0.14-0.5] stranded

1.4 Wire Insulation: Flexible vinyl, semi-rigid vinyl, x-linked polyethylene, or ETFE (see Table 1)

2. Specification:

3.1: Electrical:

Current Rating: 3.0 Amps

Voltage Rating: 32 Volts

Insulation Resistance: >1 X 10⁶ Ω at 600 VDC





Withstanding Voltage: 1,000 VRMS at sea level

3.Environmental


Temperature Rating: -20°C to +85°C ambient (1.0 A max.)

-20°C to +75°C ambient (2.0 A max.)

-20°C to +60°C ambient (3.0 A max.)

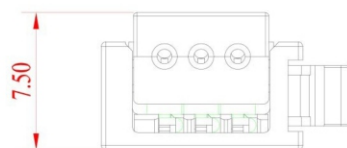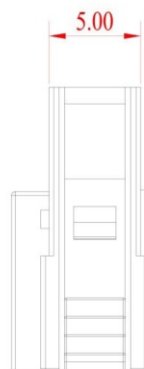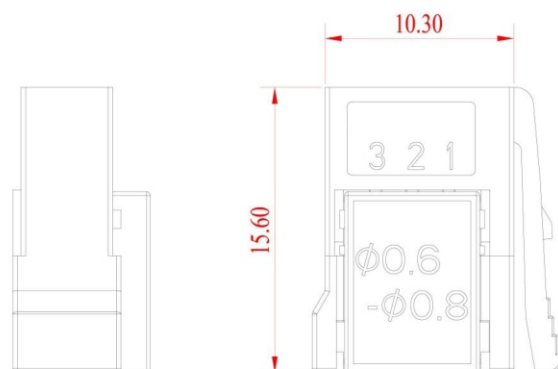

打开状态

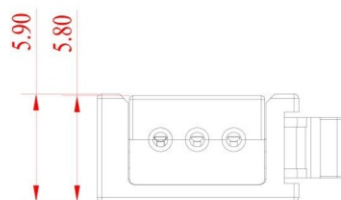

压合状态

5	上盖	PC., 颜色依客户订单, UL94V-0		1PCS
4	底盖	PA66., 白色, UL94V-0		1PCS
3	短端子	C5191R-H, T=0.4		2PCS
2	长端子	C5191R-H, T=0.4		2PCS
1	塑胶主体	PBT, +0%GF, 黑色, UL94V-0		1PCS
ITEM	PART NAME	MATERIAL	P.N	QTY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$ 0.05
ANG $\pm$ 2°

照片框

ORDER INFORMATION

ECN-Plxxyy-03-LF

SERIES | | | LEADFREE

MALE | | | 03 WAY

IDC | | | GE:GRAY

20:20~22 AWG GR:GREEN RD:RED

24:24~26 AWG OR:ORANGE VL:VIOLET

26:26~28 AWG YL:YELLOW

DESCRIPTION: