
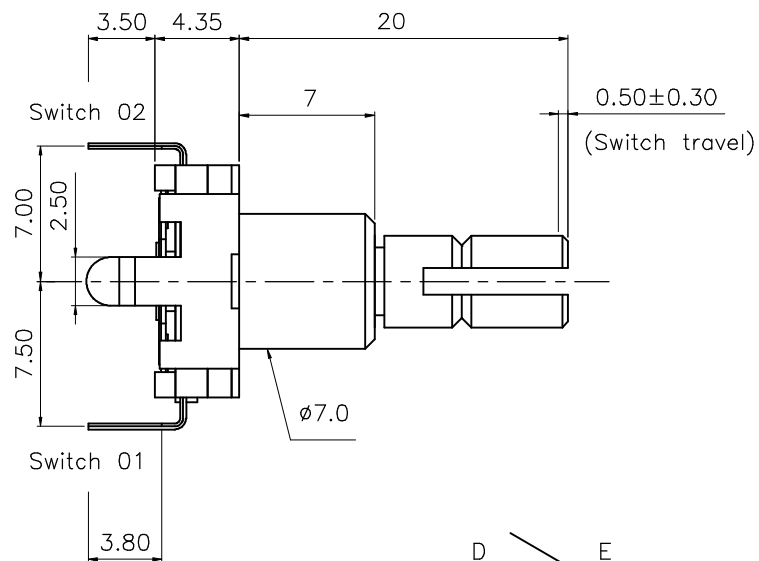
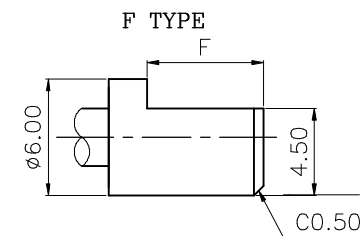
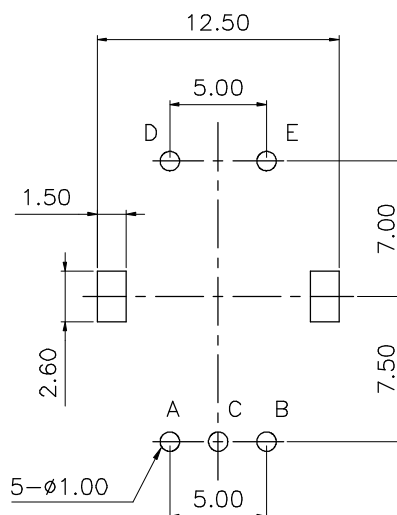



N=7mm

X	2	3	4	5
L	15	20	25	30
T	5	9	10	12
M	0.5	1	2	4
S	5.5	10	11	14

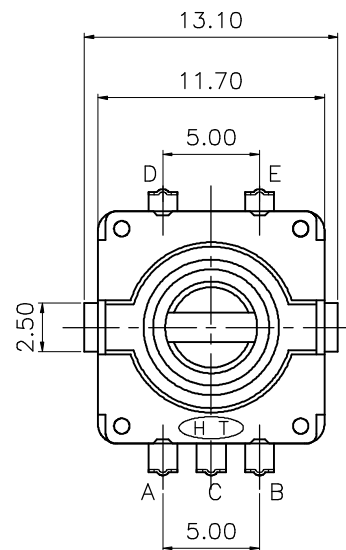

N=7mm

X	A	B	C	D	H
L	15	20	25	30	13
F	5	7	12	12	5

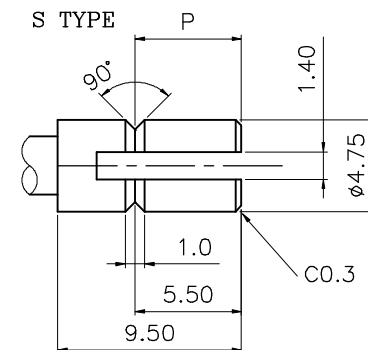

N=7mm

X	R
L	17
P	5.5

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

ECS11-D43M200-05-LF

SERIES

LEADFREE
05 WAY
LONG 20.0mm
METAL
HIGH 4.35mm
DIP 180°

DESCRIPTION:

Mechanical characteristics:機械的性能:

Item<項目>	Performance< 性能>
Total rotational angle/travel 全迴轉角度/行程	360°
Rotation torque 迴轉扭力	30~200 gf-cm
Push-pull strength 軸推拉強度	5 kgf
Click position C.C.位置	18/20 detent
Resolution 解析度	9/20 pulses

Electrical characteristics:電氣的性能:

Item<項目>	Performance< 性能>
Rated power 定格電力	5V DC ,10mA
Insulation resistance 絕緣抵抗	More than 100MΩ at DC 300V
Withstand voltage 耐電壓	More than 300V AC (1 minute)
Manual Soldering heat 手焊錫溫度	Below 300°C, Less than 3 seconds.

Durability:耐久的性能:

Item<項目>	Performance< 性能>
Rotational lif 迴轉壽命	30,000 cycles

Switch:開關的性能:

Item<項目>	Performance< 性能>
Switch Operating Force 開關作動力	600±200gf.cm
Switch Rating Power 開關額定功率	DC 16V 10mA
Switch life 開關壽命	20,000 cycles

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

ECS11-D43M200-05-LF
 SERIES | | | | LEADFREE
 | | | | 05 WAY
 | | | | LONG 20.0mm
 | | | | METAL
 | | | | HIGH 4.35mm
 | | | | DIP 180°

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

DESCRIPTION: