

WAFER RoHS COMPLIANT

Poles: 2-15

Material: Past: Brass, Tin/Plated

Base: LCP Natural

Q'ty: 500, 1000 pcs/bag

SPECIFICATIONS

Voltage rating: AC 250V DC

Current rating: AC,DC,3A

Withstand voltage: AC 800 V/min.



Insulation resistance: 1000 M Ω min.

Temperature range: -25°C~+85°C

Applicable PC board thickness: 0.8~1.6mm

Contact resistance: Initial value/10 m Ω max.

After environmental
Testing/20 m Ω max.

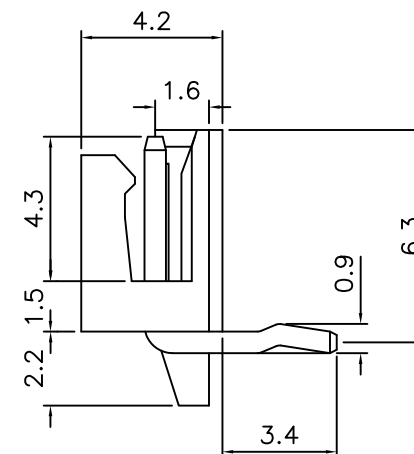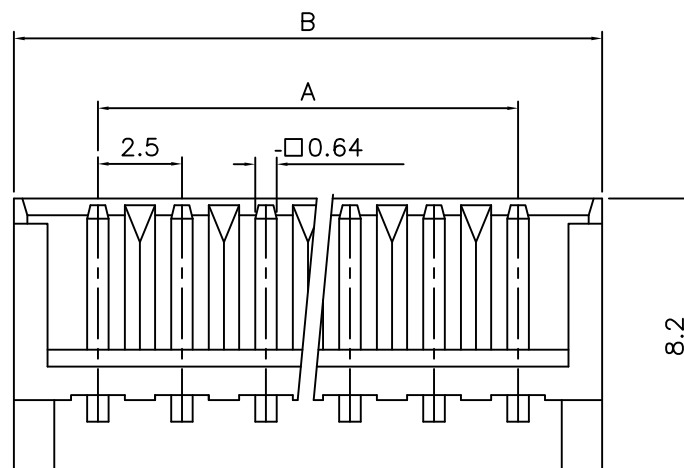

Solder-Ability:


Soldering time: 2.5 $\pm$ 0.5 Sec Solder temperature: 245 $\pm$ 5° C

Solder Wetting: 95% of immersed area must show no voids, pin holes.

Resistance to Soldering Heat:

Solder time: 10 $\pm$ 0.5 Sec. Temperature: 260°C $\pm$ 5°C 0.5mm from Terminal
tip and fitting nail tip

Appearance : no damage

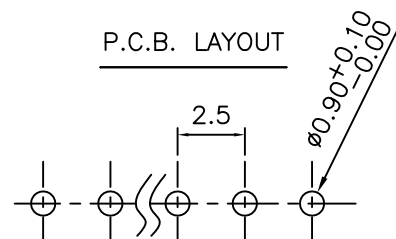

Poles	Ordering code	Dimension in.(mm)	
		A	B
2	EH-RKLCP-02	0.098(2.5)	0.295(7.5)
3	EH-RKLCP-03	0.197(5.0)	0.394(10.0)
4	EH-RKLCP-04	0.295(7.5)	0.492(12.5)
5	EH-RKLCP-05	0.394(10.0)	0.591(15.0)
6	EH-RKLCP-06	0.492(12.5)	0.689(17.5)
7	EH-RKLCP-07	0.591(15.0)	0.787(20.0)
8	EH-RKLCP-08	0.689(17.5)	0.886(22.5)
9	EH-RKLCP-09	0.787(20.0)	0.984(25.0)
10	EH-RKLCP-10	0.886(22.5)	1.083(27.5)
11	EH-RKLCP-11	0.984(25.0)	1.181(30.0)
12	EH-RKLCP-12	1.083(27.5)	1.280(32.5)
13	EH-RKLCP-13	1.181(30.0)	1.378(35.0)
14	EH-RKLCP-14	1.280(32.5)	1.476(37.5)
15	EH-RKLCP-15	1.378(35.0)	1.575(40.0)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.15
.XXX $\pm$ 0.05
ANG $\pm$

照片框

ORDER INFORMATION

EH-RKLCP-xx-LF
SERIES | LCP | LEADFREE
BLACK | 02~15WAY
DIP 90°

DESCRIPTION: P.C.BOARD CONNECTOR R/A TYPE