

Features:


- 2 ~ 12 circuits available
- Material: UL 94V-0 nylon 66
- Tin-plated brass pin
- .025"(0.64mm) square pin

Specifications:

- Current rating: 3A
- Voltage rating: 250V AC, DC
- Contact resistance: 20mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	2.5	5.0	5	10.0	12.5	8	17.5	20.0	11	25.0	27.5
3	5.0	7.5	6	12.5	15.0	9	20.0	22.5	12	27.5	30.0
4	7.5	10.0	7	15.0	17.5	10	22.5	25.0			

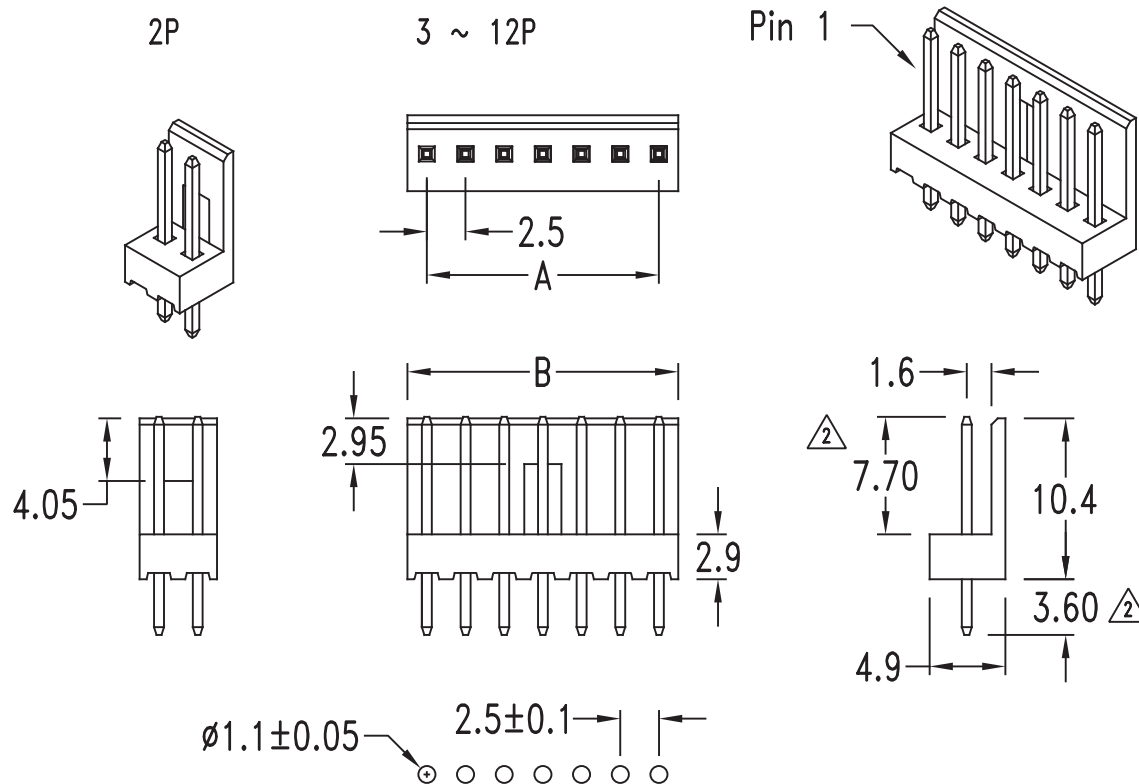

P. C. board hole dimensions

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

EI-D-xx-LF
SERIES | T LEADFREE
02~12WAY
DIP 180°

DESCRIPTION: .098"(2.5mm) Vertical Header