
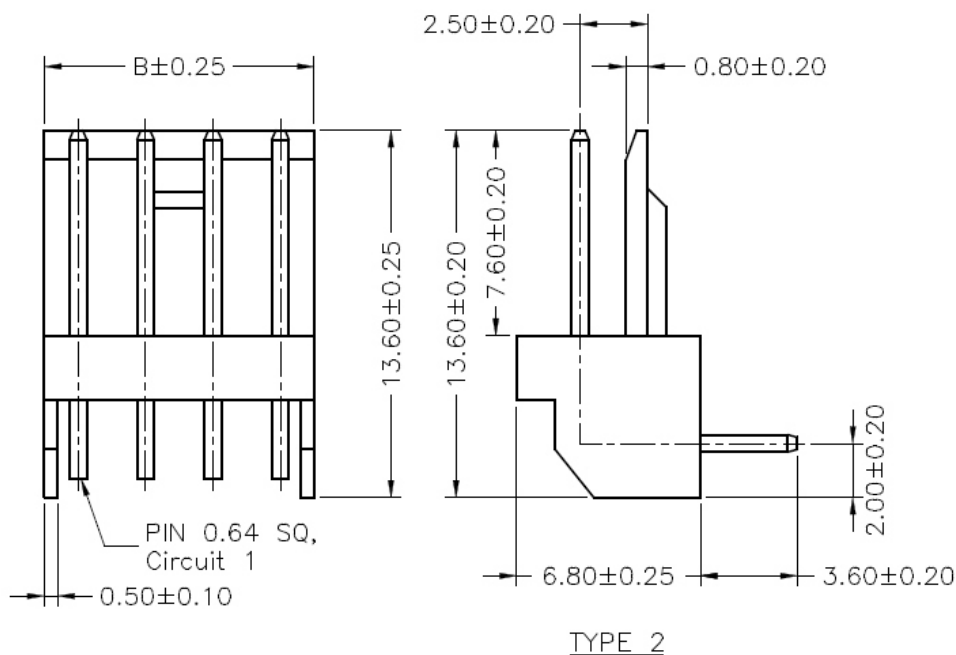
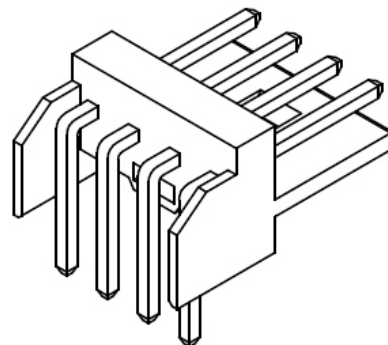



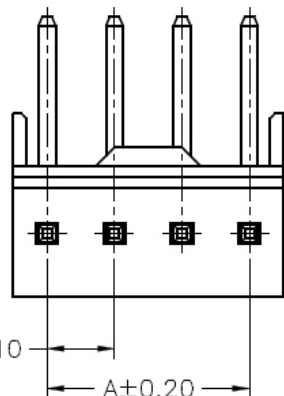

TYPE 2

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 66,UL94V-0

Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
EI-RB2-02	2.50	5.00
EI-RB2-03	5.00	7.50
EI-RB2-04	7.50	10.00
EI-RB2-05	10.00	12.50
EI-RB2-06	12.50	15.00
EI-RB2-07	15.00	17.50
EI-RB2-08	17.50	20.00
EI-RB2-09	20.00	22.50
EI-RB2-10	22.50	25.00
EI-RB2-11	25.00	27.50
EI-RB2-12	27.50	30.00

EI-RB2-xx-LF

LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. **EI-RB2-xx**

DWG NO. **EI-RB2-xx**

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE