


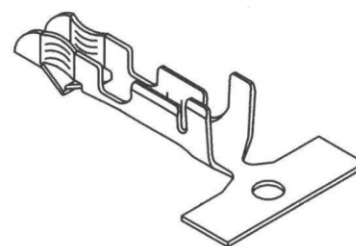


品名 Part No.	表面處理 Surface treatment	處理方式 Processing method
EI-T-20	預鍍銅板鍍底 12μ "以上；亮錫 40μ "以上 Pre-Nickeled more than 12μ ", covered by pre-tin plating more than 40μ "	先鍍後沖 Plated before pressing

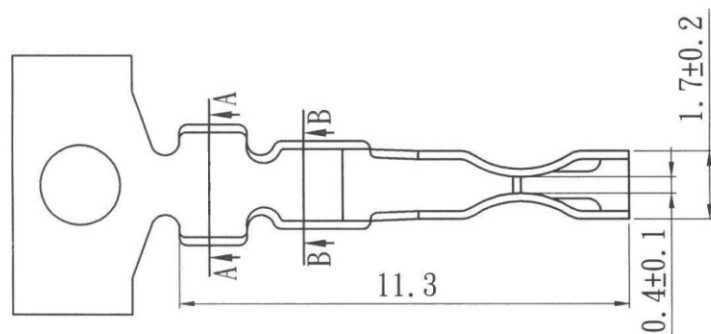

A-A Section

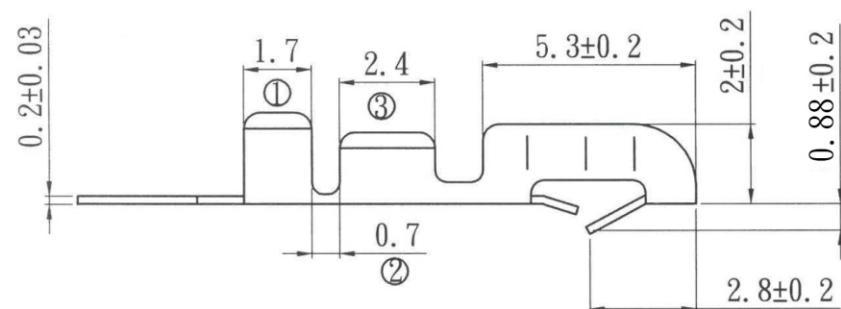

B-B Section

1. 適用電線(Applicable wire):
UL1007 AWG 20#~26#

2. 線皮外徑(Insulation O.D):
 $\phi 1.85 \sim \phi 1.30$

3. 包裝數量(Standard packing):
12000 PCS/R

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

EI-T-20-LF
SERIES T LEADFREE
20~26 AWG
TERMINAL

DESCRIPTION: