

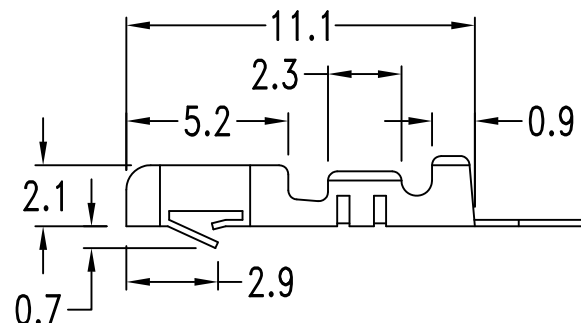



Features:

- Finished: Tin-plated
- Wire range; #24 ~ #28 AWG
- Thickness: 0.2mm

Specification:

- Engagement force: 1.8Kg Max.
Initial insertion with tin-plated .025"(0.64mm) square pin
- Disengagement force: 0.15Kg Min.
Initial cycle with tin-plated .025"(0.64mm) square pin
- Terminal retention force: 1.5Kg Min.
- Crimp strength: #24 AWG 3.0Kg Min.
#26 AWG 2.0Kg Min.
#28 AWG 1.0Kg Min.
- Ambient temperature range: -40°C ~ 105°C

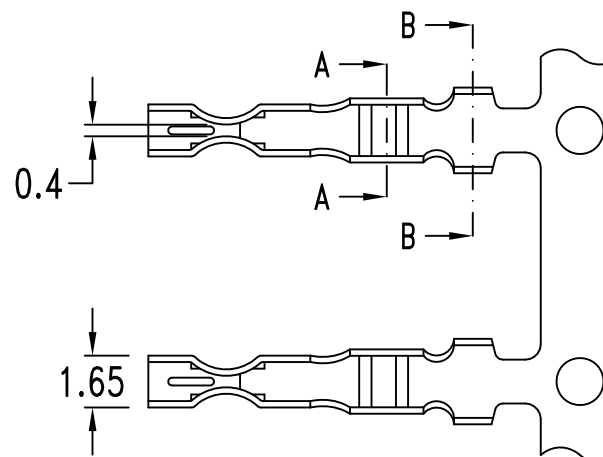

Ordering & Dimensional Information (mm)

Part No.	Dim. a	Dim. b	Dim. c	Dim. d	Wire size (AWG)	Material	Q'ty/Reel
EI-T-24	2.0	1.7	2.3	2.6	#24 ~ #28	Phos. Brz.	12000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

EI-T-24-LF
SERIES T LEADFREE
24~28 AWG
TERMINAL

DESCRIPTION: .098"(2.5mm) Crimp Terminal