
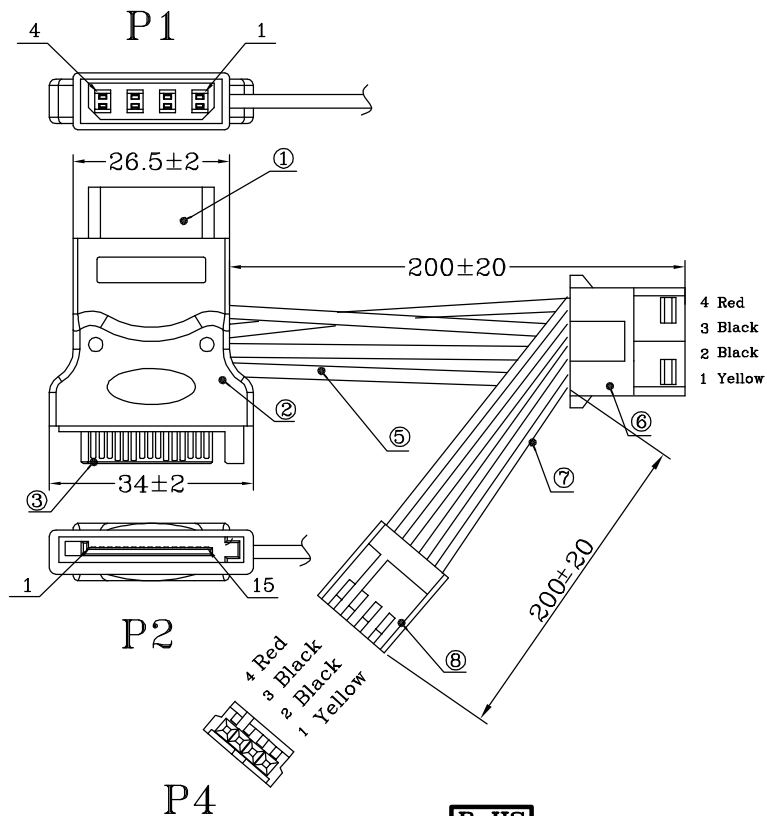


WIRE CONNECTION:

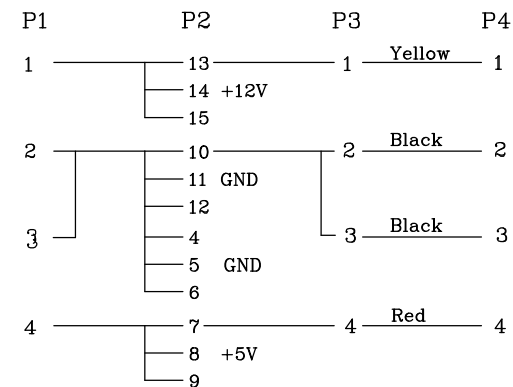

EIDPST-44154-F40C-LF
LEADFREE

RoHS Compliant

COMPONENTS	DESCRIPTION	Q'TY
1	P4FD Power 4P Female Insulator: Black P.B.T Contact: Brass Tin Plated	1
2	Hood PVC Molded Color: Black	1
3	SATA15M Insulator:LCP UL94V-0, Color: Black, Contact: Copper alloy	1
4	PCB(70-547-00) FR/4 T:1.6mm	1
5	Wire UL1007 18AWG Color: Yellow*1, Black*2, Red*1	4
6	Housing Pitch 5.08mm Power 4P Female Insulator: Nylon 66, Contact: Brass Tin Plated, Color: White	1
7	Wire UL1007 22AWG Color: Yellow*1, Black*2, Red*1	4
8	Housing Pitch 2.0mm Power 4P Female Insulator: Nylon, Contact: Brass Tin Plated, Color: White	1

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. EIDPST-44154-F40C

DWG NO. EIDPST-44154-F40C

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

Serial ATA Power Adapter
15P Male To Power

AREA

REVISIONS

HK

DATE