

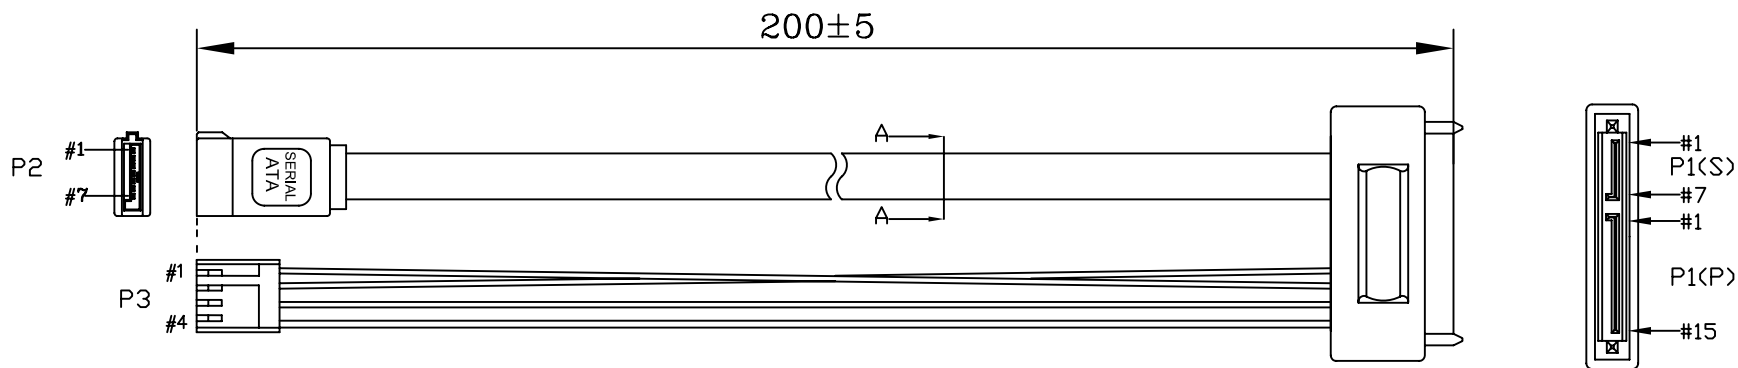


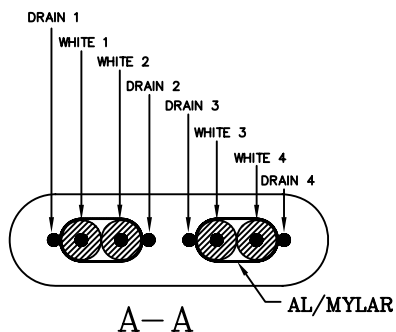

PIN ASSIGNMENT

P1(P)	P3
4+5+6 — BLACK —	2
7+8+9 — RED —	1
10+11+12 — BLACK —	3
13+14+15 — YELLOW —	4



RoHS COMPLIANT

EISA-040722-F20C-LF
LEADFREE

RoHS Compliant

10	WIRE	UL1007 #22-RED	2.5*130*3	MM
9	WIRE	UL1007 #22-BLACK	2.5*140*3	MM
8	WIRE	UL1007 #22-YELLOW	2.5*130*3	MM
5	TERMINAL	AMP 2.5-TP	4	PCS
4	HOUSING	AMP2.5-4PH	1	PCS
3	CONNECOR	SERIAL ATA: 7PIN/BLACK(MOLDING TYPE)	1	PCS
2	CONNECTOR	SERIAL ATA: 22PIN<W/O-SHELL> /BLACK(SOLDERING TYPE)	1	SET
1	CABLE	UL21149,[(26*2C+AL/MY)+DRAIN*2]*2-RED10 -2.2*7.6 (2C FLAT CALBE)(聯穎 OR EQUIV)	0.26/2	M
NO	TYPE	DESCRIPTION	QTY	UNIT

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. EISA-040722-F20C

DWG NO. EISA-040722-F20C

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION: SATA S+P 22P/ S 7P/AMP 4P L:200mm

AREA

REVISIONS

HK

DATE

煜倫股份有限公司