
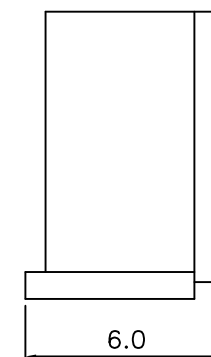
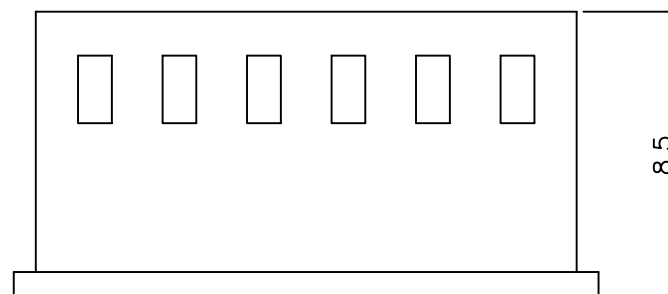


Poles	Part No.	Dimension in.(mm)	
		A	B
2	EK-H-02	0.098(2.5)	0.287(7.3)
3	EK-H-03	0.197(5.0)	0.385(9.8)
4	EK-H-04	0.295(7.5)	0.484(12.3)
5	EK-H-05	0.394(10.0)	0.582(14.8)
6	EK-H-06	0.482(12.5)	0.681(17.3)
7	EK-H-07	0.591(15.0)	0.779(19.8)
8	EK-H-08	0.689(17.5)	0.877(22.3)
9	EK-H-09	0.787(20.0)	0.976(24.8)
10	EK-H-10	0.886(22.5)	1.074(27.3)
11	EK-H-11	0.984(25.0)	1.173(29.8)
12	EK-H-12	1.083(27.5)	1.271(32.3)
13	EK-H-13	1.181(30.0)	1.370(34.8)
14	EK-H-14	1.280(32.5)	1.468(37.3)
15	EK-H-15	1.378(35.0)	1.566(39.8)
16	EK-H-16	1.476(37.5)	1.665(42.3)
17	EK-H-17	1.575(40.0)	1.763(44.8)
18	EK-H-18	1.673(42.5)	1.862(47.3)
19	EK-H-19	1.772(45.0)	1.960(49.8)
20	EK-H-20	1.870(47.5)	2.059(52.3)

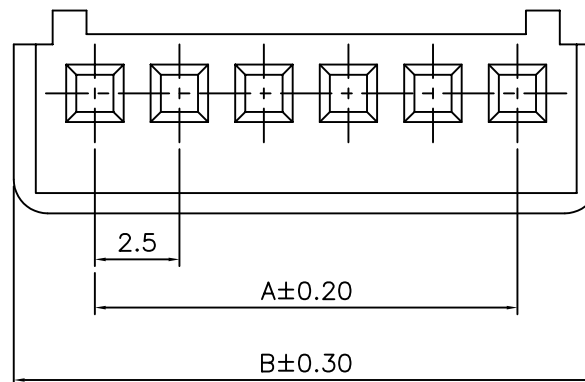

HOUSING

Poles: 2-20

Material: Nylon 94V-2

Q'ty: 500, 1000 pcs/bag

SPECIFICATIONS

Voltage rating: AC 250V DC

Current rating: AC,DC,2A

Withstand voltage: AC 650 V/min.

Insulation resistance: 1000 M Ω min.

Temperature range: -25°C~+85°C

Applicable PC board thickness: 0.8~1.6mm

Contact resistance: Initial value/10 m Ω max.

After environmental

Testing/20 m Ω max.

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. $\pm$

CHECKED BY GENIUS

.X $\pm$ 0.20

UNIT / mm

SCALE 1 : 1

.XX $\pm$ 0.10


DATE

.XXX $\pm$

ANG $\pm$

SIZE A4

PPOJECTION



ORDER INFORMATION

EK-H-xx-LF
 SERIES | LEADFREE
 02~20 WAY
 HOUSING

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司

www.morethanall.com

DESCRIPTION: Pitch 2.5mm Housing Wire Side Connector