

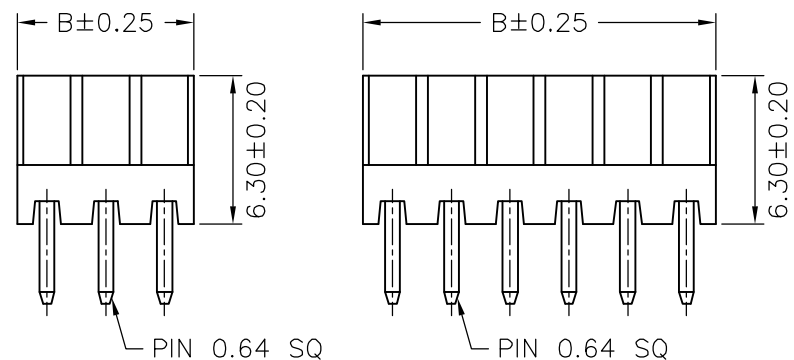





02P,03P

04P~20P

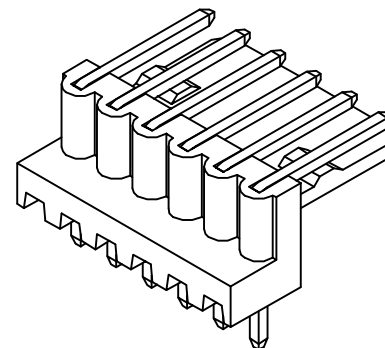

P.C.B LAYOUT

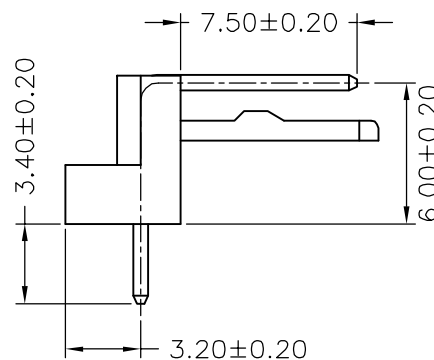

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 66,UL94V-0

Pantone Color: 7506C

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
EK-RB-02	2.50	5.00
EK-RB-03	5.00	7.50
EK-RB-04	7.50	10.00
EK-RB-05	10.00	12.50
EK-RB-06	12.50	15.00
EK-RB-07	15.00	17.50
EK-RB-08	17.50	20.00
EK-RB-09	20.00	22.50
EK-RB-10	22.50	25.00
EK-RB-11	25.00	27.50
EK-RB-12	27.50	30.00
EK-RB-13	30.00	32.50
EK-RB-14	32.50	35.00
EK-RB-15	35.00	37.50
EK-RB-16	37.50	40.00
EK-RB-17	40.00	42.50
EK-RB-18	42.50	45.00
EK-RB-19	45.00	47.50
EK-RB-20	47.50	50.00

EK-RB-xx-LF

LEADFREE

RoHS Compliant



PART NO. EK-RB-xx

DWG NO. EK-RB-xx

CHECKED BY CY


FILE NO.

DRAWING BY

UNIT / mm

SCALE 1:1

PROJECTION



TOLERANCES ARE

 ± 0.2 $.XX \pm 0.1$

.XXX ±
AWG

DESCRIPTION:

2. 50mm PITCH
90 WAFER

AREA

REVISIONS

HK

DATE

煜倫股份有限公司