


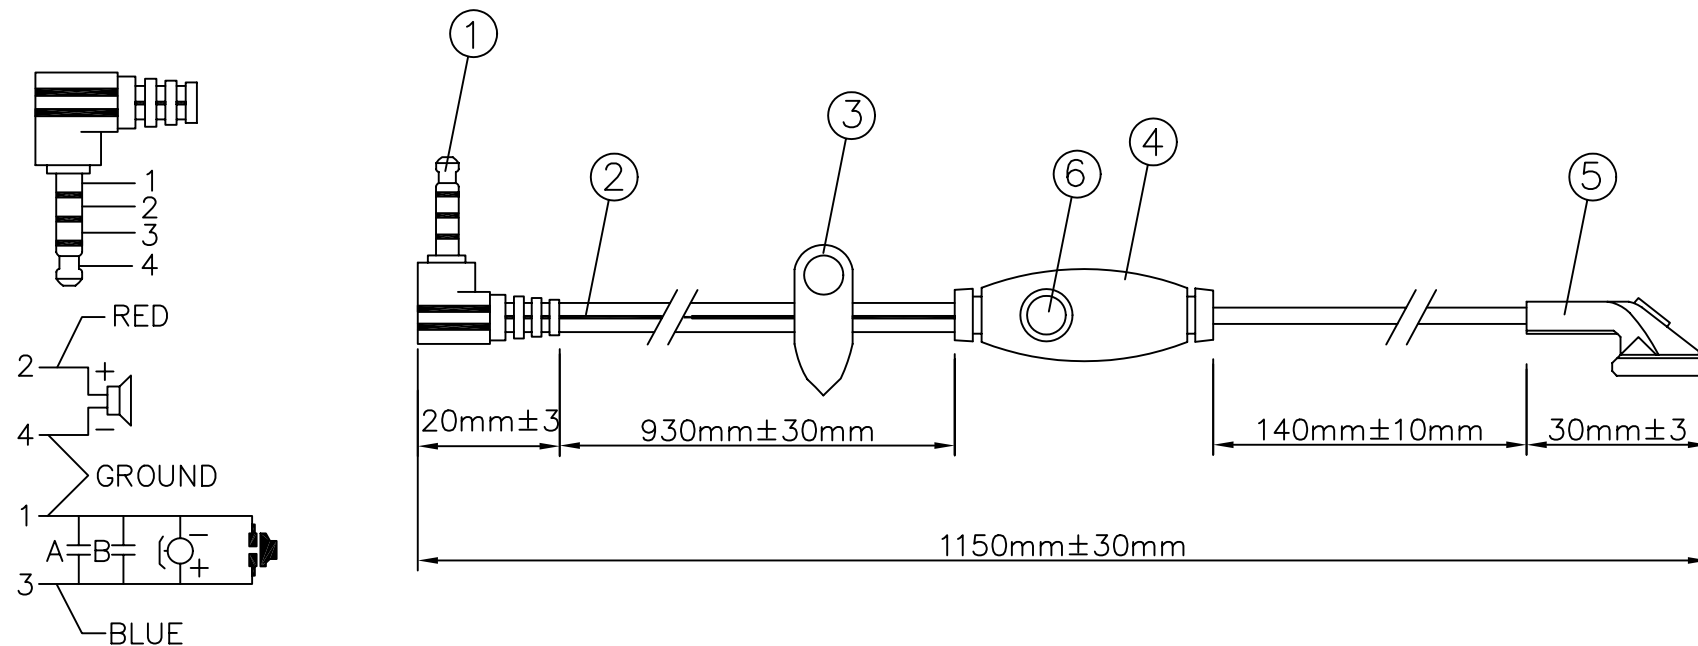

- 1.GROMMET PLUG $\varnothing 2.55\text{mm}$ 四段式插釘 NICKEL PLATED MOLDING TYPE
PVC OVERMOLDED COLOR=BLACK
- 2.CABLE IS 1.4mm*1.7mm*1.2mm (四芯漆包線)COLOR=BLACK
- 3.TIE CLIP 360° 旋轉夾 COLOR=BLACK
- 4.SPEAKER $\varnothing 15 \times 32\text{OHM}$ COLOR=BLACK
- 5.EARPIECE COLOR=BLACK
- 6.ON / OFF SWITCH
- 7.貼片電容A:10nF(0603)
- 7.貼片電容B:15nF(0603)

NOTE:

- 1.(SPEAKER)–FREQUENCY RESPONSE: 20–20000Hz
SENSITIVITY: $105 \pm 3\text{dB}$
IMPEDANCE: $32 \Omega \pm 15\%$ AT 1KHz
MAX INPUT: 10MW
- 2.(MICYOPHONE)–FREQUENCY RESPONSE: 50–20000Hz
SENSITIVITY: $-58 \pm 2\text{dB}$
RATED: DC2.0V
RATION OF S/N: OVER48dB
DIMENSION: $\varnothing 6.5$

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. ENEP-0401SW-M115C

DWG NO. ENEP-0401SW-M115C

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX $\pm$

.XXX $\pm$

AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE