
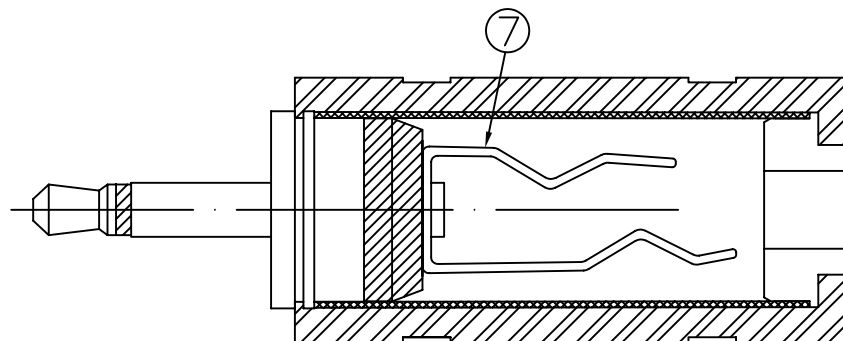


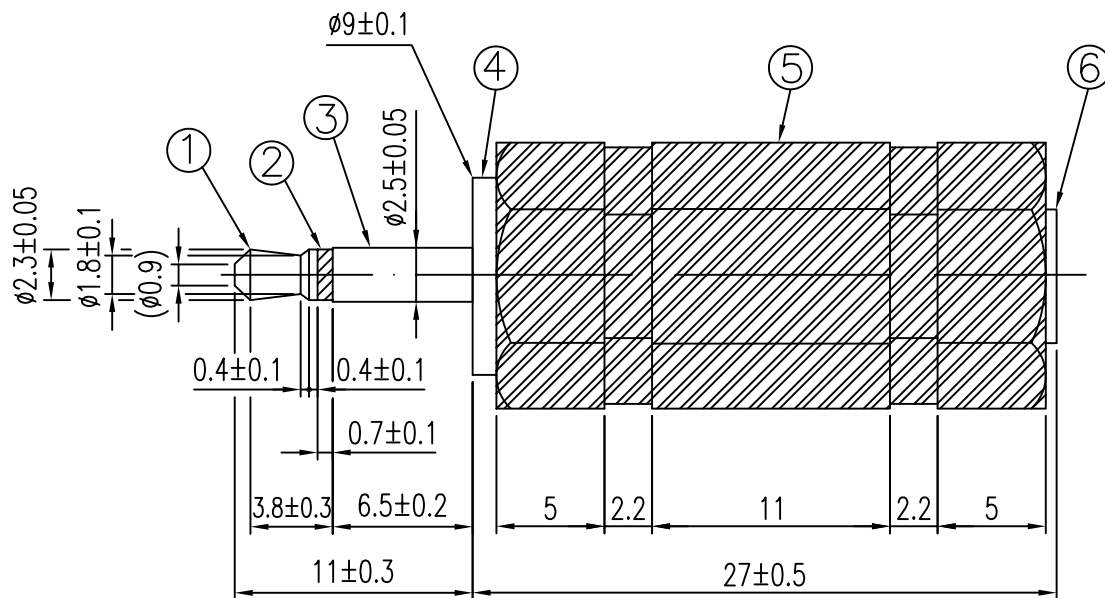

REMARK:

- 1). Contact resistance: 100m Ω or less (Between Plug and Jack)
- 2). Insulation resistance: DC 100V/100M Ω or less
- 3). Withstand voltage: AC500V/1Minute.

PART NO.	MATERIAL	PLATING
1.	BARSS	NICKEL
2.	A.B.S	BLACK
3.	BRASS	NICKEL
4.	BRASS	NICKEL
5.	PVC	BLACK
6.	BRASS	NICKEL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

ENPN-ES-0203-LF

SERIES | LEADFREE
02 TO 03 WAY
MALE TO FEMALE

DESCRIPTION: 2.5MP to 3.5SJ