
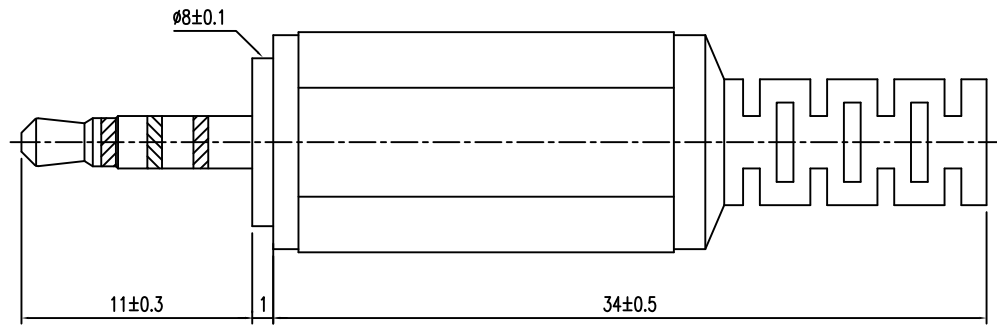
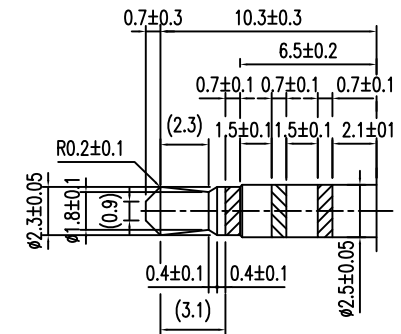


一般公差	
尺寸區分	公差
0>1.0	±0.1
1.0>6.0	±0.2
6.0>12.0	±0.3
12.0>25.0	±0.4
25.0>	±0.5

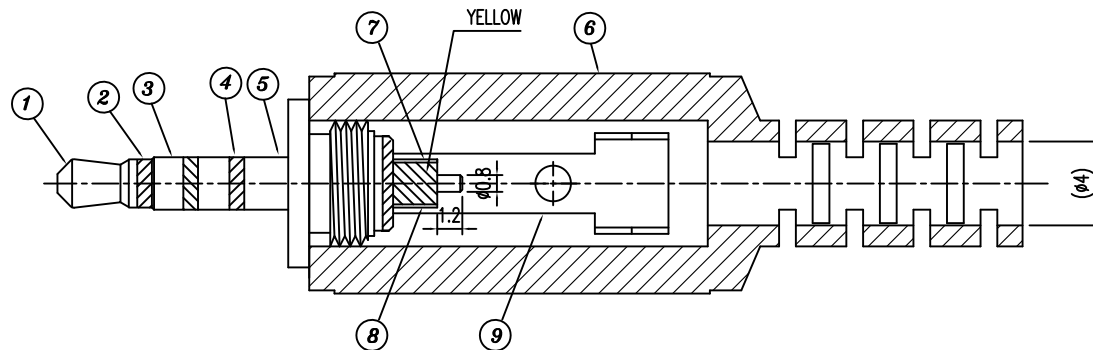

9	BRASS NICKEL
8	BRASS 2rd POLE NICKEL
7	BRASS 3rd POLE GOLD
6	TPR BLACK
5	BRASS GOLD
4	POM BLACK
3	BRASS GOLD
2	POM BLACK
1	BRASS GOLD
NO	CONTENT

1. DIELECTRIC STRENGTH : AC 200V at 1 MIN
2. INSURATION RESISTANCE : DC 100V / 50MΩ MIN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

EP-AG-04-LF
SERIES LEADFREE
04 WAY
GOLD
ASSEMBLY

DESCRIPTION: **ø2.5 PLUG 4-POLE (ASSEMBLY TYPE)**