


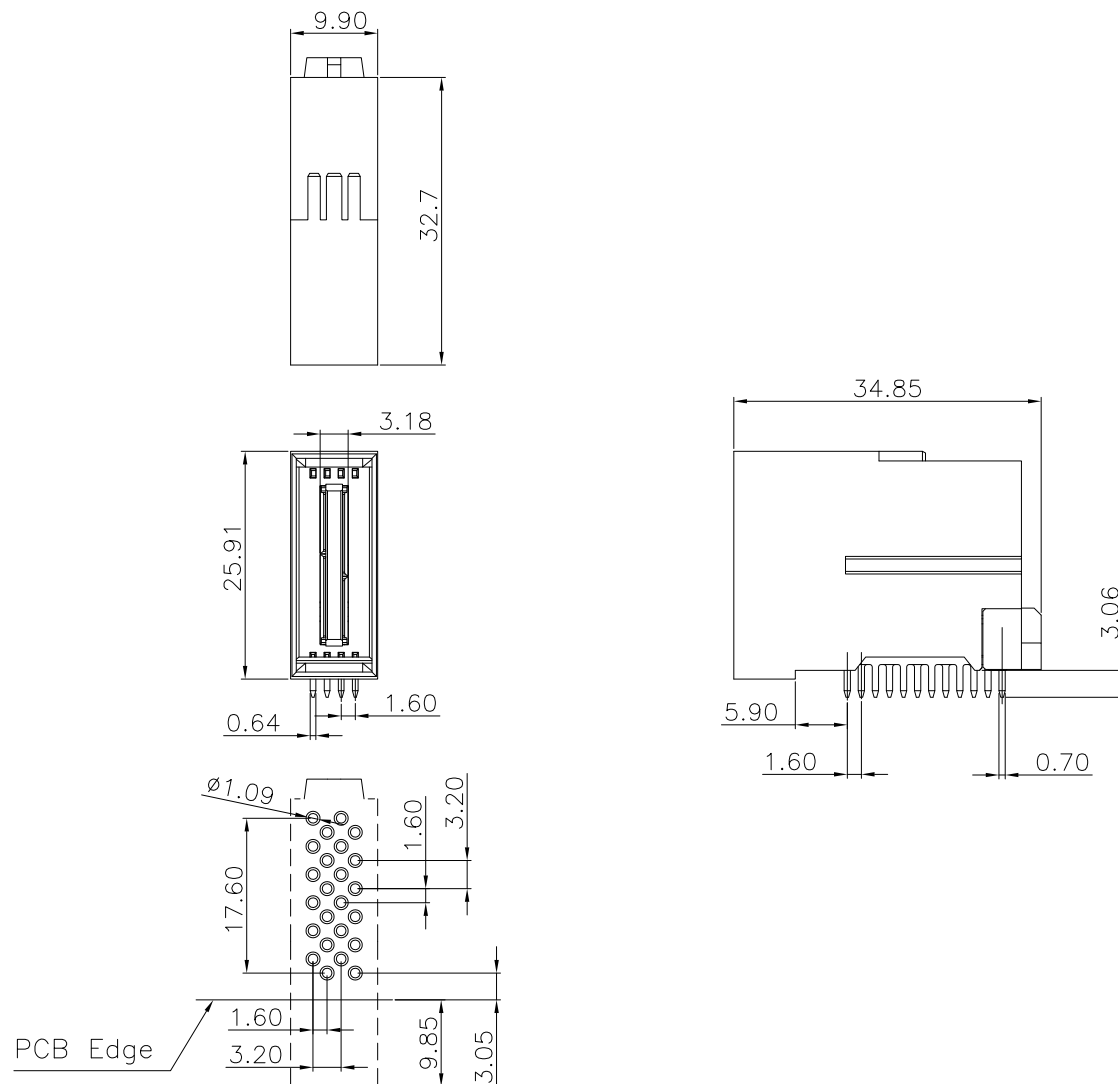

P.C. Board Layout
(Tolerance:±0.05)

Material and Plating:

Housing:LCP, UL94V-0 , Black.

Power Contacts: High Conductivity Copper.

30u"Au+Pd/Ni on Contact Area and 80u" Min Tin
Plated on Solder Tail over nickel 50u" Min .

Electrical Characteristics:

Current Rating: Power:150AMP.

Dielectric Withstanding Voltage:

Power:DC 1500V For 1 minute.


Insulator Resistance:

Power:5000MΩ min. at DC 500V.

Contact Resistance:0.10mΩ max

Operating Temperature:-40°C~+105°C.

***RoHS Compliant**



照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

ORDER INFORMATION

EPM150-PRX-1X01-LF

SERIES

LEADFREE

01 WAY

NON POST

DIP 90°

MALE

DESCRIPTION: Male Power 150AMP Connector

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com