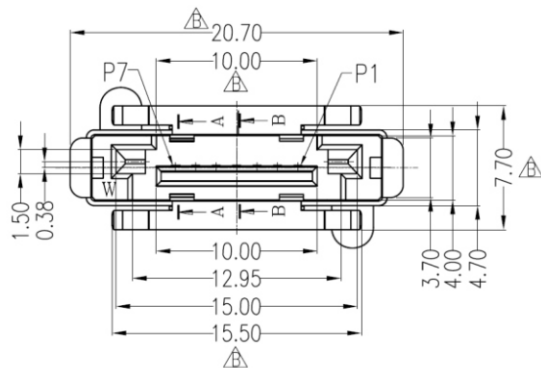

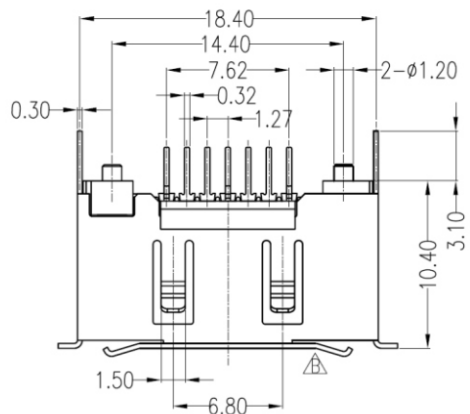


P.C.B. Layout
t=1.60mm

NOTES:

*Material

Housing: LCP(Black),UL 94-0 Rated;
Contact: Brass;
Plating: Gold plating over Nickel on contact area; Tin plating on Solder Tail.

*Mechanical

Insertion Force: 2550g max;
Withdrawal Force: 710g min;
Durability: 2500 cycles.

*Electrical Specification

Operation Voltage:100 VAC MAX.
Current Rating: 1.5 Ampere per contact
Contact Resistance: 30m OHM MAX.
Insulation Resistance: 1000M OHM MIN
Dielectric Withstanding Voltage:500VAC.

*Environmental

Operating Temperature : -55°C to +125°C.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

ESATA-PDL10-07-LF

SERIES

LEADFREE
07 WAY
ROW/PITCH 1.0mm
LEFT
DIP 180°
MALE

DESCRIPTION: