
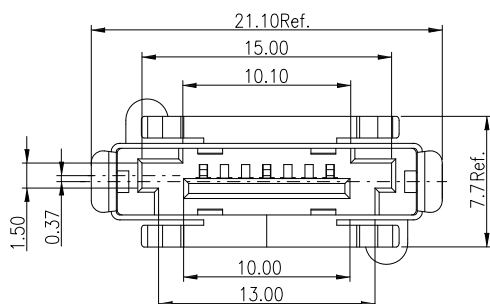
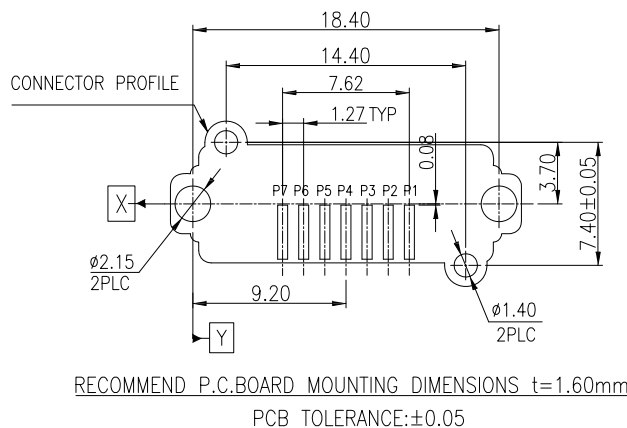
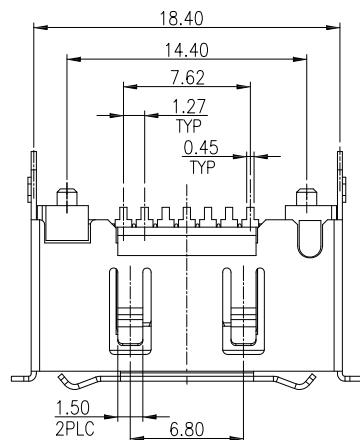
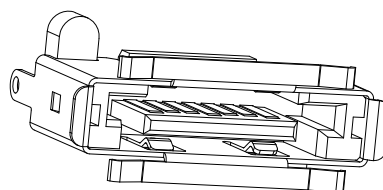


Pin Number	Signal Name
P1	GND
P2	A+
P3	A-
P4	GND
P5	B-
P6	B+
P7	GND

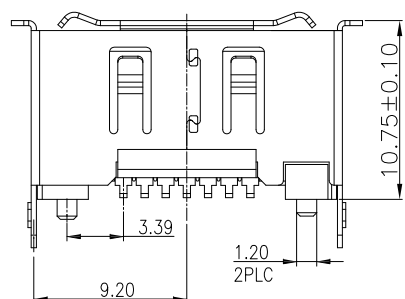

NOTES:

1. Material:

Housing: LCP+30%G.F, UL 94V-0 Rated.
Color: Black.
Contact: Brass, T=0.25mm.
Plating: Gold Plating over Nickel on Contact Area.
Tin Plating over Nickel on Solder Tail.
Shell: Brass, T=0.30mm.
Plating: Ni(50u" Min) Plating.

2. Mechanical:

Insertion Force: 4080g Max.
Withdrawal Force: 1020g Min.
Durability: 2500 Cycles.

3. Electrical Specification:

Operation Voltage: 100VAC Max.
Current Rating: 1.5 Ampere per Contact.
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding Voltage: 500 VAC.

4. Environmental:

Operating Temperature: -55°C to +85°C.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.20
ANG ± 3°

照片框

ORDER INFORMATION

ESATA-PV-07-LF

SERIES T LEADFREE
07 WAY
180°SMT
MALE

DESCRIPTION: eSATA Connector, 7P, Male, Vertical Type, SMT, Gold Flash, Plastic Post 3.2mm, LCP, Black Colo