
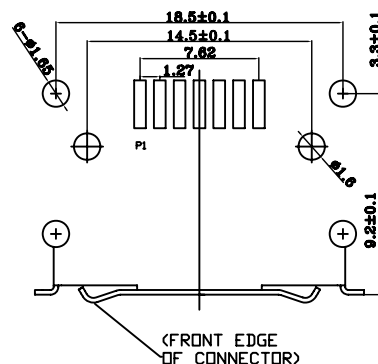



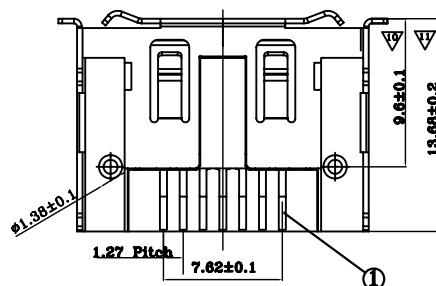
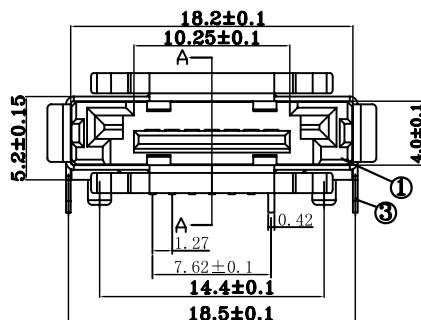


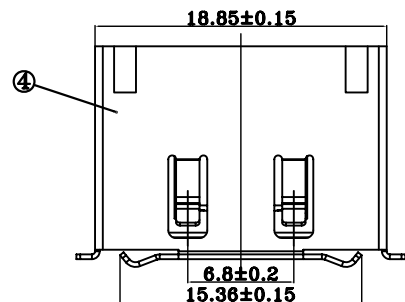

RECOMMENDED PC BOARD LAYOUT

板上型

Technical Data

Material:

Contact material: PHOSPHOR BRONZE

Insulator material: Black polyester UL94V-0

Standard: LCP

Electrical:

Current rating: 1.0Amps/contact max

Contact resistance: $\leq 20\text{m}\Omega$ /contact

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$

Withstanding voltage: 300V AC/minute

Mechanical:

Operating temperature:

Tin plated: -40°C to $+105^{\circ}\text{C}$

Soldering temperature: $+280^{\circ}\text{C}$, 10s max

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

ESATA-PWB-07-LF

SERIES T T T LEADFREE
07 WAY
BOTTOM CONTACT
90°SMT
MALE

DESCRIPTION: